

10987318-05-1702
 000/Recd/FEB 13 FEB 2002

Express Mail No.: EL913299764US

FORM PTO-1390 (REV 11-98)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEYS DOCKET NUMBER: Lee&KoUSNP	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				US APPLICATION NO (If known, see 37 CFR 1.5) 10/049719	
INTERNATIONAL APPLICATION NO PCT/KR00/00899		INTERNATIONAL FILING DATE (12.08.00) 22 August 2000		PRIORITY DATE CLAIMED (13.08.99) 13 August 1999	
TITLE OF INVENTION A Working Garment with Positive Flickering Devices					
Applicant(s) for DO/EO/US Yuan Lin					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is the FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is the SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b)) and PCT articles 22 and 39(1). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ul style="list-style-type: none"> a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)) 7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)). <ul style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)) 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (unsigned with fee paid) (35 U.S.C. 371(c)(4)) 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).					
Items 11. to 16. below concern document(s) or information included:					
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input type="checkbox"/> A FIRST preliminary amendment <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input type="checkbox"/> A substitute specification 15. <input type="checkbox"/> A change of power of attorney and or address letter 16. <input checked="" type="checkbox"/> Other items or information. Application Data Sheet, Express Mail Certificates, firm Letter of Transmittal, and a return receipt postcard.					

APPLICATION NO. (If known, see 37 CFR 1.5) 10/049719		INTERNATIONAL APPLICATION NO PCT/KR00/00899		ATTORNEY'S DOCKET NUMBER Lee&KoUSNP	
<p>17. ■ The following fees are submitted</p> <p>BASIC NATIONAL FEE (37 CFR 1.492(a) (1) - (5))</p> <p>Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$1000.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO. . . . \$860.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. . . \$710.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4). \$690.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfy provisions of PCT Article 33(1)-(4) \$100.00</p> <p style="text-align: center;">ENTER APPROPRIATE BASIC FEE AMOUNT =</p>				CALCULATIONS (PTO USE ONLY)	
<p>Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e))</p>				\$130.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	54-20 =	34	X \$18.00	\$612.00	
Independent claims	6-3 =	3	X \$80.00	\$240.00	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+\$0.00	\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1982.00	
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28)				\$0.00	
SUBTOTAL =				\$1982.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				\$0.00	
TOTAL NATIONAL FEE =				\$1982.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$0.00	
TOTAL FEES ENCLOSED =				\$1982.00	
<p>a. ■ A check in the amount of \$1982.00 to cover the above fees is enclosed.</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees</p> <p>c. <input type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any over payment to Deposit Account No. _____ A Duplicate copy of this sheet is enclosed</p> <p>Note: Where the appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending process.</p> <p>SEND ALL CORRESPONDENCE TO.</p> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> <div style="width: 45%;"> <p> SIGNATURE</p> <p>Santangelo Law Offices, P.C. 125 South Howes, Third Floor, Fort Collins, CO 80521</p> </div> <div style="width: 45%; text-align: center;"> <p>Craig R. Miles NAME (Registration No. 45,954)</p> </div> </div>					

Express Mail No: EL913299764US
Attorney Docket: Lee&KoUSNP

IN THE UNITED STATES PATENT
AND TRADEMARK OFFICE

In Re the Application of: Dong Young Kim and Yun Chur Chung

Serial Number: (original KR) 1999-33359 New: _____
(PCT) PCT/KR00/00899

Filed: (original KR) 13 August 1999 New: _____
(PCT) 12 August 2000

For: Fiber Optic Cable for Increased Transmission Capacity and Wavelength
Division Multi-Plexing Optical Transmission System Using the Same

Assignees: LG Cable Ltd. and Korean Advanced Institute of Science and Technology

PRELIMINARY AMENDMENT

Before calculating the fees on the above examination and before examining the above-referenced application, please amend the application as follows:

AMENDMENT

Please amend the application as follows:

In the claims:

Please amend claims 1-54 without prejudice.

Pursuant to 37 C.F.R. §1.121, the applicant submits a clean set of claims as amended. The applicant has consolidated all separate amendments to the claims into a single clean version which is to be construed as a cancellation of all previous versions of the claims with respect to

this application. The applicant respectfully requests entry of the clean version of the claims as set forth beginning on the next separate page:

1. A fiber optic cable for a wavelength division multiplexing (WDM) optical transmission system including a plurality of connected optical fibers, wherein each of the connected optical fibers is formed of a plurality of optical fibers respectively exhibiting different dispersion values and different dispersion slopes in a predetermined operating wavelength range while having different lengths and different effective areas, the optical fibers being connected to one another in an optional order.

2. The fiber optic cable according to claim 1, wherein the different dispersion values and different lengths of the optical fibers in each of the connected optical fibers are controlled so that the corrected optical fiber has an average dispersion value corresponding to a value required in the WDM optical transmission system.

3. The fiber optic cable according to claim 1, wherein the different dispersion values, different slopes, and different lengths of the optical fibers in each of the connected optical fibers are controlled so that the connected optical fiber has an average dispersion slope corresponding to a value required in the WDM optical transmission system.

4. The fiber optic cable according to claim 1, wherein the different effective areas and different lengths of the optical fibers in each of the connected optical fibers are controlled so that the connected optical fiber has an average effective area corresponding to a value required in the WDM optical transmission system.

5. The fiber optic cable according to claim 1, wherein at least a part of the different dispersion values are +2 ps/nm-km or more, and at least the other part of the different dispersion values are -2 ps/nm-km or less.

6. The fiber optic cable according to claim 5, wherein the optical fibers of each of the connected optical fibers are connected to one another in such a fashion that adjacent ones of the optical fibers have dispersion values of opposite signs, respectively, while exhibiting a dispersion

value difference of at least 10 ps/nm-km there between.

7. The fiber optic cable according to claims 1, wherein each of the connected optical fibers has a length of 0.5 to 20 km.

8. A fiber optic cable for a wavelength division multiplexing (WDM) optical transmission system including a plurality of connected optical fibers, wherein each of the connected optical fibers comprises: a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area; and a second optical fiber exhibiting a second dispersion value and a second dispersion slope in the predetermined operating wavelength range while having a second length and a second effective area; the first and second optical fibers being connected together in an optional order.

9. The fiber optic cable according to claim 8, wherein the first dispersion value and first length of the first optical fiber and the second dispersion value and second length of the second optical fiber are controlled so that an associated one of the connected optical fibers has an average dispersion value corresponding to a value required in the WDM optical transmission system.

10. The fiber optic cable according to claim 8, wherein the first dispersion value, first dispersion slope, and first length of the first optical fiber and the second dispersion value, second dispersion slope, and second length of the second optical fiber are controlled so that an associated one of the connected optical fibers has a dispersion value corresponding to a value required in the WDM optical transmission system.

11. The fiber optic cable according to claim 8, wherein the first length and first effective area of the first optical fiber and the second length and second effective area of the second optical fiber are controlled so that an associated one of the connected optical fibers has an effective area corresponding to a value required in the WDM optical transmission system.

12. The fiber optic cable according to claim 9, wherein the first dispersion value of the first optical fiber, the second dispersion value of the second optical fiber, and the average dispersion value of the associated connected optical fiber are function of an operating wavelength (λ), and the average dispersion value of the connected optical fiber is determined by the following equation:

$$D_{cf}(\lambda) = \frac{D_1(\lambda)l_1 + D_2(\lambda)l_2}{l_1 + l_2}$$

In the equation,

" D_{cf} " represents the average dispersion value (ps/nm-km) of the connected optical fiber;

" D_1 " represents the first dispersion value (ps/nm-km) of the first optical fiber;

" D_2 " represents the second dispersion value (ps/nm-km) of the first optical fiber;

" l_1 " represents the first length (km) of the first optical fiber; and

" l_2 " represents the second length (km) of the second optical fiber.

13. The fiber optic cable according to claim 10, wherein the first dispersion value and first dispersion slope of the first optical fiber, the second dispersion value and second dispersion slope of the second optical fiber, and the dispersion value and dispersion slope of an associated one of the connected optical fibers are function of an operating wavelength (λ), and the dispersion value of the connected optical fiber is determined by the following equation:

$$S_{cf}(\lambda) = \frac{\partial D_{cf}(\lambda)}{\partial \lambda} = \frac{\frac{\partial D_1(\lambda)}{\partial \lambda}l_1 + \frac{\partial D_2(\lambda)}{\partial \lambda}l_2}{l_1 + l_2} = \frac{S_1(\lambda)l_1 + S_2(\lambda)l_2}{l_1 + l_2}$$

In the equation,

" S_{cf} " represents the dispersion slope (ps/nm²-km) of the connected optical fiber;

- “D_{cf}” represents the average dispersion value (ps/nm-km) of the connected optical fiber;
 “D₁” represents the first dispersion value (ps/nm-km) of the first optical fiber;
 “D₂” represents the second dispersion value (ps/nm-km) of the first optical fiber;
 “S₁” represents the first dispersion slope (ps/nm²-km) of the first optical fiber;
 “S₂” represents the second dispersion slope (ps/nm²-km) of the second optical fiber;
 “L₁” represents the first length (km) of the first optical fiber; and
 “L₂” represents the second length (km) of the second optical fiber.

14. The fiber optic cable according to claim 11, wherein the effective area of the connected optical fiber is fiber; determined by the following equation:

$$A_{cf} = \frac{L_1 L_2 - 1}{\frac{\alpha_1}{\alpha_3} \frac{L_1 - 1}{A_1} + \frac{\alpha_2}{\alpha_3} \frac{L_2 (L_2 - 1)}{A_2}}$$

In the equation,

- “A_{cf}” represents the effective connected optical fiber;
 “L₁” represents the first length optical fiber;
 “L₂” represents the second length (km) of the second optical fiber;
 “α₁” represents a loss index (/km) of the first optical fiber;
 “α₂” represents a loss index (/km) of the second optical fiber;
 “α₃” is expressed by “α₃ = $\frac{\alpha_1 L_1 + \alpha_2 L_2}{L_1 + L_2}$ ”;
 “α₁” is expressed by “α₁ = 0.1 x a₁ x log(10)”
 “α₂” is expressed by “α₂ = 0.1 x a₂ x log(10)”
 “a₁” represents a loss coefficient (dB/km) of the first optical fiber;
 “a₂” represents a loss coefficient (dB/km) of the second optical fiber;
 “L₁” is expressed by “L₁ = exp (-α₁ L₁)”; and
 “L₂” is expressed by “L₂ = exp (-α₂ L₂)”;

15. The fiber optic cable according to claim 8, wherein the first and second dispersion values have opposite signs, respectively, while exhibiting a difference of at least 10 ps/nm-km therebetween.

16. The fiber optic cable according to claim 8, wherein the first dispersion slope has a positive value, and the second dispersion slope has a negative value.

17. The fiber optic cable according to claim 8, wherein the first and second dispersion slopes have positive values, respectively.

18. The fiber optic cable according to claim 8, wherein the first dispersion value of the first optical fiber ranges from +4 ps/nm-km to +20 ps/nm-Km at a central wavelength in the operating wavelength range, and the second dispersion value of the second optical fiber ranges from -20 ps/nm-kn to -4 ps/nm-km at the central wavelength in the operating wavelength range.

19. The fiber optic cable according to claim 18, wherein the first dispersion value ranges from 15 ps/nm-km to 18 ps/m-km, and the second dispersion value ranges from -12 ps/nm-km to -9 ps/nm-kn.

20. The fiber optic cable according to claim 8, wherein the first dispersion slope has a value of +0.1 ps/nm²-km or less, and the second dispersion slope has a value of -0.1 ps/nm²-km.

21. The fiber optic cable according to any one of claims 8 to 14, wherein the first and second dispersion slopes have values of +0.1 ps/nm²-km or less, respectively.

22. The fiber optic cable according to claim 8, wherein the first effective area ranges from 50 μm² to 90 μm², and the second effective area ranges from 30 μm² to 80 μm².

23. The fiber optic cable according to claim 19, wherein the first and second lengths of

[illegible]

28. The fiber optic cable according to claim 26, wherein the first dispersion value, first dispersion slope, and first length of the first optical fiber, the second dispersion value, second dispersion slope, and second length of the second optical fiber, and the first dispersion value, first dispersion slope, and third length of the third optical fiber are controlled so that an associated one of the connected optical fibers has a dispersion value corresponding to a value required in the WDM optical transmission system.

29. The fiber optic cable according to claim 26, wherein the first length and first effective area of the first optical fiber, the second length and second effective area of the second optical fiber, and the third length and first effective area of the third optical fiber are controlled so that an associated one of the connected optical fibers has an effective area corresponding to a value required in the WDM optical transmission system.

30. The fiber optic cable according to claim 27, wherein the first dispersion value of the first and third optical fibers, the second dispersion value of the second optical fiber, and the average dispersion value of the associated connected optical fiber are function of an operating wavelength (λ) and the average dispersion optical fiber is determined by value of the following equation:

$$D_{\text{eff}}(\lambda) = \frac{D_1(\lambda)l_1 + D_2(\lambda)l_2 + D_3(\lambda)l_3}{l_1 + l_2 + l_3}$$

In the equation,

“ D_{eff} ” represents the average dispersion value (ps/nm-km) of the connected optical fiber;

“ D_1 ” represents the first dispersion value (ps/nm-km) of the first optical fiber;

“ D_2 ” represents the second dispersion value (ps/nm-km) of the first optical fiber;

“ l_1 ” represents the first length (km) of the first optical fiber;

“ l_2 ” represents the second length (km) of the second optical fiber; and

“ l_3 ” represents the third length (km) of the third optical fiber.

31. The fiber optic cable according to claim 28, wherein the first dispersion value and first dispersion slope of the first and third optical fibers, the second dispersion value and second dispersion slope of the second optical fiber, and the average dispersion value and dispersion slope of an associated one of the connected optical fibers are function of an operating wavelength (λ), and the dispersion value of the connected optical fiber is determined by the following equation:

$$S_{cf}(\lambda) = \frac{\partial D_{cf}(\lambda)}{\partial \lambda} = \frac{\frac{\partial D_1(\lambda)}{\partial \lambda} l_1 + \frac{\partial D_2(\lambda)}{\partial \lambda} l_2 + \frac{\partial D_3(\lambda)}{\partial \lambda} l_3}{l_1 + l_2 + l_3} = \frac{S_1(\lambda) l_1 + S_2(\lambda) l_2 + S_3(\lambda) l_3}{l_1 + l_2 + l_3}$$

In the equation,

- " S_{cf} " represents the dispersion slope (ps/nm²-km) of the connected optical fiber;
- D_{cf} " represents the average dispersion value (ps/nm-km) of the connected optical fiber;
- " D_1 " represents the first dispersion value (ps/nm-km) of the first optical fiber;
- " D_2 " represents the second dispersion value (ps/nm-km) of the first optical fiber;
- " l_1 " represents the first length (km) of the first optical fiber;
- " l_2 " represents the second length (km) of the second optical fiber.
- " l_3 " represents the third length (km) of the third optical fiber.
- " S_1 " represents the first dispersion slope (ps/nm²-km) of the first optical fiber; and
- " S_2 " represents the second dispersion slope (ps/nm²-km) of the second optical fiber.

32. The fiber optic cable according to claim 29, wherein the effective area of the connected optical fiber is determined by the following equation:

In the equation,

$$A_{cf} = \frac{L_1 L_2 L_3 - 1}{\frac{\alpha_1 (L_1 - L_1 L_2 + L_1 L_2 L_3 - 1)}{A_1} + \frac{\alpha_2 L_1 (L_2 - 1)}{A_2}}$$

“A_{cf}” represents the effective connected area (μm²) of the connected optical fiber;

" l_1 " represents the first length (km) of the first optical fiber;

" l_2 " represents the second length (km) of the second optical fiber;

" l_3 " represents the third length (km) of the third optical fiber;

" α_1 " represents a loss index (/km) of the first optical fiber;

" α_2 " represents a loss index (an) of the second optical fiber;

" α_3 " is, expressed by " $\alpha_3 = \frac{\alpha_1 l_1 + \alpha_2 l_2 + \alpha_3 l_3}{l_1 + l_2 + l_3}$ (/km);

" α_1 " is expressed by " $\alpha_1 = 0.1 \times a_1 \times \log(10)$ ";

" α_2 " is expressed by " $\alpha_2 = 0.1 \times a_1 \times \log(10)$ ";

"a_{1}" represents a loss coefficient (dB/km) of the first optical fiber;

" α_{2} " represents a loss coefficient (dB/km) of the second optical fiber;

"L1" is expressed by " $L_1 = \exp(-a_1 l_1)$ ";

"L2" is expressed by " $L_2 = \exp(-a_2 l_2)$ "; and

"L1" is expressed by " $L_3 = \exp(-a_3 l_3)$ ".

33. The fiber optic cable according to claim 26, wherein the first and second dispersion values have opposite signs, respectively, while exhibiting a difference of at least 10 ps/nm-km there between.

34. The fiber optic cable according to claim 26, wherein the first dispersion slope has a positive value, and the second dispersion slope has a negative value.

35. The fiber optic cable according to claims 26, wherein the first and second dispersion slopes have positive values, respectively.

36. The fiber optic cable according to claims 26, wherein the first dispersion value of the first optical fiber ranges from +4 ps/nm-km to +20 ps/nm-km at a central wavelength in the operating wavelength range, and the second dispersion value of the second optical fiber ranges from -20 ps/nm-km to -4 ps/nm-km at the central wavelength in the operating wavelength range.

37. The fiber optic cable according to claim 36, wherein the first dispersion value ranges from 15 ps/nm-km to 18 ps/nm-km, and the second dispersion value ranges from -12 ps/nm-km to -9 ps/nm-km.

38. The fiber optic cable according to claim 26, wherein the first dispersion slope has a value of +0.1 ps/nm²-km or less, and the second dispersion slope has a value of -0.1 ps/nm²-km.

39. The fiber optic cable according to claim 26, wherein the first and second dispersion slopes have values of +0.1 ps/nm²-km or less, respectively.

40. The fiber optic cable according to claims 26, wherein the first effective area ranges from 50 μm^2 to 90 μm^2 , and the second effective area ranges from 30 μm^2 to 80 μm^2 .

41. The fiber optic cable according to claim 37, wherein the first, second, and third lengths range from 3 km to 6 km, respectively.

42. The fiber optic cable according to claim 26, wherein the first, second, and third optical fibers exhibit a dispersion value of 0 in a wavelength range of 1,300 to 1,500 nm.

43. The fiber optic cable according to claim 26, wherein the first optical fiber exhibits a dispersion value of 0 in a wavelength range of 1,300 to 1,500 nm, and the second optical fiber exhibits a dispersion value of 0 at a wavelength of 1,600 nm or more.

44. The fiber optic cable according to claim 1, wherein the connected optical fiber has an average dispersion value ranging from 1 ps/nm-km to 10 ps/nm-km.

45. The fiber optic cable according to claim 1, wherein the operating wavelength range is selected from the group consisting of a range from 1,300 nm to 1,530 nm, a range from 1,400 nm to

1,565 nm, and a range from 1,530 nm to 1,650 nm.

46. A wavelength division multiplexing (WDM) optical transmission system having a predetermined channel spacing and a predetermined number of channels, comprising:

a transmitting terminal for providing a plurality of optical signals respectively having different wavelengths;

a multiplexer connected to the transmitting terminal and adapted to multiplex the optical signals;

a plurality of fiber optic cables each including a plurality of connected optical fibers, each of the connected optical fibers being formed of a plurality of optical fibers respectively exhibiting different dispersion values and different dispersion slopes in a predetermined operating wavelength range while having different lengths and different effective areas, the optical fibers being connected to one another in an optional order;

connecting means for interconnecting the fiber optic cables;

optical amplifiers for amplifying the optical signal being transmitted through the fiber optic cables;

a demultiplexer for demultiplexing the optical signal transmitted through the fiber optic cables; and

a receiving terminal connected to the demultiplexer and adapted to receive the demultiplexed optical signal.

47. A wavelength division multiplexing (WDM) optical transmission system having a predetermined channel spacing and a predetermined number of channels, comprising:

a transmitting terminal for providing a plurality of optical signals respectively having different wavelengths;

a multiplexer connected to the transmitting terminal and adapted to multiplex the, optical signals;

a plurality of fiber optic cables each including a plurality of connected optical fibers, each of the connected optical fibers including a first optical fiber exhibiting a first dispersion value

and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area, and a second optical fiber exhibiting a second dispersion value and a second dispersion slope in the predetermined operating wavelength range while having a second length and a second effective area, the first and second optical fibers being connected together in an optional order.

connecting means for interconnecting the fiber optic cables;
 optical amplifiers for amplifying the optical signal being transmitted through the fiber optic cables;
 a demultiplexer for demultiplexing the optical signal transmitted through the fiber optic cables; and
 a receiving terminal connected to the demultiplexer and adapted to receive the demultiplexed optical signal.

48. A wavelength division multiplexing (WDM) optical transmission system having a predetermined channel spacing and a predetermined number of channels, comprising:

a transmitting terminal for providing a plurality of optical signals respectively having different wavelengths; a multiplexer connected to the transmitting terminal and adapted to multiplex the optical signals;

a plurality of fiber optic cables each including a plurality of connected optical fibers, each of the connected optical fibers including a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area, a second optical fiber exhibiting a second dispersion value and a second dispersion slope at the predetermined operating wavelength range while having a second length and a second effective area, a third first dispersion value and the predetermined operating wavelength range while having a third length and the first effective area, the first optical fiber, the second optical fiber, and the third optical fiber being connected to one another in this order.

connecting means for interconnecting the fiber optic cables; optical amplifiers for amplifying the optical signal being transmitted through the fiber optic cables;
 a demultiplexer for demultiplexing the optical signal transmitted through the fiber optic

REMARKS

The present application is the United States National Stage of international application no. PCT/KR00/00899. The claims in this United States National Stage application have been amended to solely to expedite the examination of application. The applicant presents the claims as amended without waiving the right to add claims such as dependent claims or increase the dependency of the claims already disclosed herein as part of a subsequent division, continuation, continuation-in-part application, or similar application. The enclosed fee sheet is based on the claims submitted after this preliminary amendment.

Version With Markings To Show Changes Made. Pursuant to 37 C.F.R. §1.121, the applicant submits a marked up version of the claims to show changes made beginning on the next full page:

1. A fiber optic cable for a wavelength division multiplexing (WDM) optical transmission system including a plurality of connected optical fibers, wherein each of the connected optical fibers is formed of a plurality of optical fibers respectively exhibiting different dispersion values and different dispersion slopes in a predetermined operating wavelength range while having different lengths and different effective areas, the optical fibers being connected to one another in an optional order.

2. The fiber optic cable according to claim 1, wherein the different dispersion values and different lengths of the optical fibers in each of the connected optical fibers are controlled so that the connected optical fiber has an average dispersion value corresponding to a value required in the WDM optical transmission system.

3. The fiber optic cable according to claim 1, wherein the different dispersion values, different slopes, and different lengths of the optical fibers in each of the connected optical fibers are controlled so that the connected optical fiber has an average dispersion slope corresponding to a value required in the WDM optical transmission system.

4. The fiber optic cable according to claim 1, wherein the different effective areas and different lengths of the optical fibers in each of the connected optical fibers are controlled so that the connected optical fiber has an average effective area corresponding to a value required in the WDM optical transmission system.

5. The fiber optic cable according to [any one of] claim[s] 1 [to 4], wherein at least a part of the different dispersion values are +2 ps/nm-km or more, and at least the other part of the different dispersion values are -2 ps/nm-km or less.

6. The fiber optic cable according to claim 5, wherein the optical fibers of each of the connected optical fibers are connected to one another in such a fashion that adjacent ones of the optical fibers have dispersion values of opposite signs, respectively, while exhibiting a dispersion

value difference of at least 10 ps/nm-km there between.

7. The fiber optic cable according to [any one of] claim[s] 1 [to 4], wherein each of the connected optical fibers has a length of 0.5 to 20 km.

8. A fiber optic cable for a wavelength division multiplexing (WDM) optical transmission system including a plurality of connected optical fibers, wherein each of the connected optical fibers comprises: a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area; and a second optical fiber exhibiting a second dispersion value and a second dispersion slope in the predetermined operating wavelength range while having a second length and a second effective area; the first and second optical fibers being connected together in an optional order.

9. The fiber optic cable according to claim 8, wherein the first dispersion value and first length of the first optical fiber and the second dispersion value and second length of the second optical fiber are controlled so that an associated one of the connected optical fibers has an average dispersion value corresponding to a value required in the WDM optical transmission system.

10. The fiber optic cable according to claim 8, wherein the first dispersion value, first dispersion slope, and first length of the first optical fiber and the second dispersion value, second dispersion slope, and second length of the second optical fiber are controlled so that an associated one of the connected optical fibers has a dispersion value corresponding to a value required in the WDM optical transmission system.

11. The fiber optic cable according to claim 8, wherein the first length and first effective area of the first optical fiber and the second length and second effective area of the second optical fiber are controlled so that an associated one of the connected optical fibers has an effective area corresponding to a value required in the WDM optical transmission system.

12. The fiber optic cable according to claim 9, wherein the first dispersion value of the first optical fiber, the second dispersion value of the second optical fiber, and the average dispersion value of the associated connected optical fiber are function of an operating wavelength (λ), and the average dispersion value of the connected optical fiber is determined by the following equation:

$$D_{cf}(\lambda) = \frac{D_1(\lambda)l_1 + D_2(\lambda)l_2}{l_1 + l_2}$$

In the equation,

" D_{cf} " represents the average dispersion value (ps/nm-km) of the connected optical fiber;

" D_1 " represents the first dispersion value (ps/nm-km) of the first optical fiber;

" D_2 " represents the second dispersion value (ps/nm-km) of the first optical fiber;

" l_1 " represents the first length (km) of the first optical fiber; and

" l_2 " represents the second length (km) of the second optical fiber.

13. The fiber optic cable according to claim 10, wherein the first dispersion value and first dispersion slope of the first optical fiber, the second dispersion value and second dispersion slope of the second optical fiber, and the dispersion value and dispersion slope of an associated one of the connected optical fibers are function of an operating wavelength (λ), and the dispersion value of the connected optical fiber is determined by the following equation:

$$S_{cf}(\lambda) = \frac{\partial D_{cf}(\lambda)}{\partial \lambda} = \frac{\frac{\partial D_1(\lambda)}{\partial \lambda}l_1 + \frac{\partial D_2(\lambda)}{\partial \lambda}l_2}{l_1 + l_2} = \frac{S_1(\lambda)l_1 + S_2(\lambda)l_2}{l_1 + l_2}$$

In the equation,

" S_{cf} " represents the dispersion slope (ps/nm²-km) of the connected optical fiber;

- “D_{cf}” represents the average dispersion value (ps/nm-km) of the connected optical fiber;
 “D₁” represents the first dispersion value (ps/nm-kn) of the first optical fiber;
 “D₂” represents the second dispersion value (ps/nm-km) of the first optical fiber;
 “S₁” represents the first dispersion slope (ps/nm²-km)) of the first optical fiber;
 “S₂” represents the second dispersion slope (ps/nm²-km) of the second optical fiber;
 “I₁” represents the first length (km) of the first optical fiber; and
 “I₂” represents the second length (km) of the second optical fiber.

14. The fiber optic cable according to claim 11, wherein the effective area of the connected optical fiber is fiber; determined by the following equation:

$$A_{cf} = \frac{L_1 L_2 - 1}{\frac{\alpha_3}{\alpha_1} \frac{L_1 - 1}{A_1} + \frac{\alpha_3}{\alpha_2} \frac{L_1 (L_2 - 1)}{A_2}}$$

In the equation,

- “A_{cf}” represents the effective connected optical fiber;
 “I₁” represents the first length optical fiber;
 “I₂” represents the second length (km) of the second optical fiber;
 “α₁” represents a loss index (/km) of the first optical fiber;
 “α₂” represents a loss index (/km) of the second optical fiber;
 “α₃” is expressed by “α₃ = $\frac{\alpha_1 I_1 + \alpha_2 I_2}{I_1 + I_2}$ ”;
 “α₁” is expressed by “α₁ = 0.1 x a₁ x log(10)”
 “α₂” is expressed by “α₁ = 0.1 x a₂ x log(10)”
 “a_{1}” represents a loss coefficient (dB/km) of the first optical fiber;
 “a_{1}” represents a loss coefficient (dB/km) of the second optical fiber;
 “L1” is expressed by “L₁ = exp (-α₁I₁)”; and
 “L1” is expressed by “L₂ = exp (-α₂I₂)”; “L1” is expressed by “L₁ = exp (-α₁I₁)”; and
 “L2” is expressed by “L₂ = exp (-α₂I₂)”.

15. The fiber optic cable according to [any one of] claim[s] 8 [to 14], wherein the first and second dispersion values have opposite signs, respectively, while exhibiting a difference of at least 10 ps/nm-km there between.
16. The fiber optic cable according to [any one of] claim[s] 8 [to 14], wherein the first dispersion slope has a positive value, and the second dispersion slope has a negative value.
17. The fiber optic cable according to [any one of] claim[s] 8 [to 14], wherein the first and second dispersion slopes have positive values, respectively.
18. The fiber optic cable according to [any one of] claim[s] 8 [to 14], wherein the first dispersion value of the first optical fiber ranges from +4 ps/nm-km to +20 ps/nm-Km at a central wavelength in the operating wavelength range, and the second dispersion value of the second optical fiber ranges from -20 ps/nm-km to -4 ps/nm-km at the central wavelength in the operating wavelength range.
19. The fiber optic cable according to claim 18, wherein the first dispersion value ranges from 15 ps/nm-km to 18 ps/m-km, and the second dispersion value ranges from -12 ps/nm-km to -9 ps/nm-km.
20. The fiber optic cable according to [any one of] claim[s] 8 [to 14], wherein the first dispersion slope has a value of +0.1 ps/nm²-km or less, and the second dispersion slope has a value of -0.1 ps/nm²-km.
21. The fiber optic cable according to [any one of] claim[s] 8 [to 14], wherein the first and second dispersion slopes have values of +0.1 ps/nm²-km or less, respectively.
22. The fiber optic cable according to [any one of] claim[s] 8 [to 14], wherein the first effective area ranges from 50 μm² to 90 μm², and the second effective area ranges from 30 μm² to

80 μm^2 .

23. The fiber optic cable according to claim 19, wherein the first and second lengths of the first and second optical fibers range from 3 km to 6 km, respectively.

24. The fiber optic cable according to [any one of]claim[s] 8 [to 14], wherein the first and second optical fibers exhibit a dispersion value of 0 in a wavelength range of 1,300 to 1,550 nm.

25. The fiber optic cable according to [any one of] claim[s] 8 [to 14], wherein the first optical fiber exhibits a dispersion value of 0 in a wavelength range of 1,300 to 1,500 nm, and the second optical fiber exhibits a dispersion value of 0 at a wavelength of 1,600 nm or more.

26. A fiber optic cable for a wavelength division multiplexing (WDM) optical transmission system including a plurality of connected optical fibers, wherein each of the connected optical fibers comprises:

a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area;

a second optical fiber exhibiting a second dispersion value and a second dispersion slope at the predetermined operating wavelength range while having a second length and a second effective area; and

a third optical fiber exhibiting the first dispersion value and the first dispersion slope at the predetermined operating wavelength range while having a third length and the first effective area;

the first optical fiber, the second optical fiber, and the third optical fiber being connected to one another in this order.

27. The fiber optic cable according to claim 26, wherein the first dispersion value and first length of the first optical fiber, the second dispersion value and second length of the second optical

fiber, and the first dispersion value and third length of the third optical fiber are controlled so that an associated one of the connected optical fibers has an average dispersion value corresponding to a value required in the WDM optical transmission system.

28. The fiber optic cable according to claim 26, wherein the first dispersion value, first dispersion slope, and first length of the first optical fiber, the second dispersion value, second dispersion slope, and second length of the second optical fiber, and the first dispersion value, first dispersion slope, and third length of the third optical fiber are controlled so that an associated one of the connected optical fibers has a dispersion value corresponding to a value required in the WDM optical transmission system.

29. The fiber optic cable according to claim 26, wherein the first length and first effective area of the first optical fiber, the second length and second effective area of the second optical fiber, and the third length and first effective area of the third optical fiber are controlled so that an associated one of the connected optical fibers has an effective area corresponding to a value required in the WDM optical transmission system.

30. The fiber optic cable according to claim 27, wherein the first dispersion value of the first and third optical fibers, the second dispersion value of the second optical fiber, and the average dispersion value of the associated connected optical fiber are function of an operating wavelength (λ) and the average dispersion optical fiber is determined by value of the following equation:

$$D_{cf}(\lambda) = \frac{D_1(\lambda)l_1 + D_2(\lambda)l_2 + D_3(\lambda)l_3}{l_1 + l_2 + l_3}$$

In the equation,

“ D_{cf} ” represents the average dispersion value (ps/nm-km) of the connected optical fiber;

“ D_1 ” represents the first dispersion value (ps/nm-km) of the first optical fiber;

“ D_2 ” represents the second dispersion value (ps/nm-km) of the first optical fiber;

" l_1 " represents the first length (Jan) of the first optical fiber;

" l_2 " represents the second length (km) of the second optical fiber; and

" l_3 " represents the third length (Jan) of the third optical fiber.

31. The fiber optic cable according to claim 28, wherein the first dispersion value and first dispersion slope of the first and third optical fibers, the second dispersion value and second dispersion slope of the second optical fiber, and the average dispersion value and dispersion slope of an associated one of the connected optical fibers are function of an operating wavelength (λ), and the dispersion value of the connected optical fiber is determined by the following equation:

$$S_{cf}(\lambda) = \frac{\partial D_{cf}(\lambda)}{\partial \lambda} = \frac{\frac{\partial D_1(\lambda)}{\partial \lambda} l_1 + \frac{\partial D_2(\lambda)}{\partial \lambda} l_2 + \frac{\partial D_1(\lambda)}{\partial \lambda} l_3}{l_1 + l_2 + l_3} = \frac{S_1(\lambda) l_1 + S_2(\lambda) l_2 + S_1(\lambda) l_3}{l_1 + l_2 + l_3}$$

In the equation,

" S_{cf} " represents the dispersion slope (ps/nm²-km) of the connected optical fiber;

" D_{cf} " represents the average dispersion value (ps/nm-km) of the connected optical fiber;

" D_1 " represents the first dispersion value (ps/nm-km) of the first optical fiber;

" D_2 " represents the second dispersion value (ps/nm-kn) of the first optical fiber;

" l_1 " represents the first length (km) of the first optical fiber;

" l_2 " represents the second length (km) of the second optical fiber.

" l_3 " represents the third length (km) of the third optical fiber.

" S_1 " represents the first dispersion slope (ps/nm²-km) of the first optical fiber; and

" S_2 " represents the second dispersion slope (ps/nm²-km) of the second optical fiber.

32. The fiber optic cable according to claim 29, wherein the effective area of the connected optical fiber is determined by the following equation:

In the equation,

$$A_{cf} = \frac{L_1 L_2 L_3 - 1}{\frac{\alpha_3 (L_1 - L_1 L_2 + L_1 L_2 L_3 - 1)}{\alpha_1} + \frac{\alpha_3 L_1 (L_2 - 1)}{\alpha_2} + \frac{\alpha_3 L_1 L_2 (L_3 - 1)}{\alpha_3}}$$

“ A_{cf} ” represents the effective connected area (μm^2) of the connected optical fiber;

“ L_1 ” represents the first length (km) of the first optical fiber;

“ L_2 ” represents the second length (km) of the second optical fiber;

“ L_3 ” represents the third length (km) of the third optical fiber;

“ α_1 ” represents a loss index (/km) of the first optical fiber;

“ α_2 ” represents a loss index (/km) of the second optical fiber;

“ α_3 ” is, expressed by “ $\alpha_3 = \frac{\alpha_1 L_1 + \alpha_2 L_2 + \alpha_3 L_3}{L_1 + L_2 + L_3}$ (/km)”;

“ α_1 ” is expressed by “ $\alpha_1 = 0.1 \times a_1 \times \log(10)$ ”;

“ α_2 ” is expressed by “ $\alpha_2 = 0.1 \times a_2 \times \log(10)$ ”;

“ a_1 ” represents a loss coefficient (dB/km) of the first optical fiber;

“ a_2 ” represents a loss coefficient (dB/km) of the second optical fiber;

“ L_1 ” is expressed by “ $L_1 = \exp(-a_1 L_1)$ ”;

“ L_2 ” is expressed by “ $L_2 = \exp(-a_2 L_2)$ ”; and

“ L_3 ” is expressed by “ $L_3 = \exp(-a_3 L_3)$ ”.

33. The fiber optic cable according to [any one of] claim[s] 26 [to 32], wherein the first and second dispersion values have opposite signs, respectively, while exhibiting a difference of at least 10 ps/nm-km there between.

34. The fiber optic cable according to [any one of] claim[s] 26 [to 32], wherein the first dispersion slope has a positive value, and the second dispersion slope has a negative value.

35. The fiber optic cable according to [any one of] claim[s] 26 [to 32], wherein the first and second dispersion slopes have positive values, respectively.

36. The fiber optic cable according to [any one of] claim[s] 26 [to 32], wherein the first dispersion value of the first optical fiber ranges from +4 ps/nm-km to +20 ps/nm-km at a central wavelength in the operating wavelength range, and the second dispersion value of the second optical fiber ranges from -20 ps/nm-km to -4 ps/nm-km at the central wavelength in the operating wavelength range.

37. The fiber optic cable according to claim 36, wherein the first dispersion value ranges from 15 ps/nm-km to 18 ps/nm-km, and the second dispersion value ranges from -12 ps/nm-km to -9 ps/nm-km.

38. The fiber optic cable according to [any one of] claim[s] 26 [to 32], wherein the first dispersion slope has a value of +0.1 ps/nm²-km or less, and the second dispersion slope has a value of -0.1 ps/nm²-km.

39. The fiber optic cable according to [any one of] claim[s] 26 [to 32], wherein the first and second dispersion slopes have values of +0.1 ps/nm²-km or less, respectively.

40. The fiber optic cable according to [any one of] claim[s] 26 [to 32], wherein the first effective area ranges from 50 μm² to 90 μm², and the second effective area ranges from 30 μm² to 80 μm².

41. The fiber optic cable according to claim 37, wherein the first, second, and third lengths range from 3 km to 6 km, respectively.

42. The fiber optic cable according to [any one of] claims 26 [to 32], wherein the first, second, and third optical fibers exhibit a dispersion value of 0 in a wavelength range of 1,300 to 1,500 nm.

43. The fiber optic cable according to [any one of] claim[s] 26 [to 32], wherein the first

optical fiber exhibits a dispersion value of 0 in a wavelength range of 1,300 to 1,500 nm, and the second optical fiber exhibits a dispersion value of 0 at a wavelength of 1,600 nm or more.

44. The fiber optic cable according to claim 1[, 8, or 26,] wherein the connected optical fiber has an average dispersion value ranging from 1 ps/nm-km to 10 ps/nm-km.

45. The fiber optic cable according to claim 1, [8, or 26,] wherein the operating wavelength range is selected from the group consisting of a range from 1,300 nm to 1,530 nm, a range from 1,400 nm to 1,565 nm, and a range from 1,530 nm to 1,650 nm.

46. A wavelength division multiplexing (WDM) optical transmission system having a predetermined channel spacing and a predetermined number of channels, comprising:

a transmitting terminal for providing a plurality of optical signals respectively having different wavelengths;

a multiplexer connected to the transmitting terminal and adapted to multiplex the optical signals;

a plurality of fiber optic cables each including a plurality of connected optical fibers, each of the connected optical fibers being formed of a plurality of optical fibers respectively exhibiting different dispersion values and different dispersion slopes in a predetermined operating wavelength range while having different lengths and different effective areas, the optical fibers being connected to one another in an optional order;

connecting means for interconnecting the fiber optic cables;

optical amplifiers for amplifying the optical signal being transmitted through the fiber optic cables;

a demultiplexer for demultiplexing the optical signal transmitted through the fiber optic cables; and

a receiving terminal connected to the demultiplexer and adapted to receive the demultiplexed optical signal.

47. A wavelength division multiplexing (WDM) optical transmission system having a predetermined channel spacing and a predetermined number of channels, comprising:

a transmitting terminal for providing a plurality of optical signals respectively having different wavelengths;

a multiplexer connected to the transmitting terminal and adapted to multiplex the optical signals;

a plurality of fiber optic cables each including a plurality of connected optical fibers, each of the connected optical fibers including a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area, and a second optical fiber exhibiting a second dispersion value and a second dispersion slope in the predetermined operating wavelength range while having a second length and a second effective area, the first and second optical fibers being connected together in an optional order.

connecting means for interconnecting the fiber optic cables;

optical amplifiers for amplifying the optical signal being transmitted through the fiber optic cables;

a demultiplexer for demultiplexing the optical signal transmitted through the fiber optic cables; and

a receiving terminal connected to the demultiplexer and adapted to receive the demultiplexed optical signal.

48. A wavelength division multiplexing (WDM) optical transmission system having a predetermined channel spacing and a predetermined number of channels, comprising:

a transmitting terminal for providing a plurality of optical signals respectively having different wavelengths; a multiplexer connected to the transmitting terminal and adapted to multiplex the optical signals;

a plurality of fiber optic cables each including a plurality of connected optical fibers, each of the connected optical fibers including a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area, a second optical fiber exhibiting a second dispersion value

fiber of another one of the fiber optic cables adjacent to the first optical fiber of the selected fiber optic cable while generating a minimum connection loss.

54. The WDM optical transmission system according to claim 48, wherein the connecting means connects the third optical fiber of a selected one of the fiber optic cables to the first optical fiber of another one of the fiber optic cables adjacent to the third optical fiber of the selected fiber optic cable while generating a minimum connection loss.


CONCLUSION

The applicant requests entry and examination of the claims as preliminarily without waiving any right to have the claims as originally recited examined in this or a subsequent application.

Dated this 13 day of February, 2002.

Respectfully submitted,

SANTANGELO Law Offices, P.C.

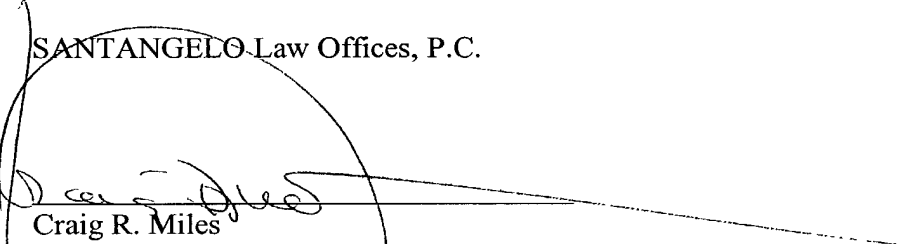

Craig R. Miles
Attorney for Applicant
PTO No. 45,954
125 South Howes, Third Floor
Fort Collins, CO 80521
(970) 224-3100

wri\coalbed\division\prelim.amd

10/049719
JC18 Rec'd PCT/PTO 13 FEB 2002

Express Mail No: EL913299764US
Attorney Docket: Lee&KoUSNP

IN THE UNITED STATES PATENT
AND TRADEMARK OFFICE

In Re the Application of: Dong Young Kim and Yun Chur Chung

Serial Number: (original KR) 1999-33359 New: _____
(PCT) PCT/KR00/00899

Filed: (original KR) 13 August 1999 New: _____
(PCT) 12 August 2000

For: Fiber Optic Cable for Increased Transmission Capacity and Wavelength
Division Multi-Plexing Optical Transmission System Using the Same

Assignees: LG Cable Ltd. and Korean Advanced Institute of Science and Technology

CERTIFICATE OF EXPRESS MAILING

I, Cheryl A. Swanson, hereby certify to the truth of the following items:

1. I am an employee of Santangelo Law Offices, P.C., 125 South Howes, Third Floor,
Fort Collins, Colorado 80521.

2. I have this day deposited the attached Preliminary Amendment with the United States
Postal Service as "Express Mail" for mailing to the Assistant Commissioner for Patents, Box PCT,
Washington, D.C. 20231.

Dated this 13 day of February, 2002.

Cheryl A. Swanson
Cheryl A. Swanson

13/pt
FIBER OPTIC CABLE FOR INCREASED TRANSMISSION CAPACITY AND
WAVELENGTH DIVISION MULTIPLEXING OPTICAL TRANSMISSION SYSTEM
USING THE SAME

5 Technical Field

The present invention relates to a fiber optic cable used in a wavelength division multiplexing (WDM) optical transmission system, and more particularly to a fiber optic
10 cable capable of suppressing influences, caused by a non-linearity of optical fibers, to a maximum while controlling dispersion characteristics to an appropriate level in order to obtain a maximum transmission capacity per optical fiber. Also, the present invention relates to WDM optical
15 transmission system using the fiber optic cable, and more particularly to a WDM optical transmission system which can operate efficiently even when it uses a reduced channel spacing for an increase in transmission capacity.

20 Background Art

Optical transmission techniques using optical fibers have rapidly been developed in that they can transmit a large quantity of data within a short period of time while involving

a reduced transmission loss. In particular, such optical transmission techniques have further been advanced by virtue of development of a new optical fiber capable of transmitting signals for a long distance while involving a reduced signal
5 loss, and development of a superior light source such as a semiconductor laser.

However, known optical fibers involve a chromatic dispersion, that is, a phenomenon in which a signal is spread due to a difference in group velocity among the wavelength
10 components of the signal. Due to such a chromatic dispersion, a signal overlap occurs at the receiving terminal, thereby resulting in a fatal problem such as an impossibility of demodulation. For this reason, attempts to minimize such a chromatic dispersion (hereinafter, simple referred to as a
15 "dispersion") have been made. By virtue of such attempts, it has been found that a zero dispersion is achieved at an operating wavelength of 1,310 nm.

Meanwhile, it has been found, on the basis of the relation between the total loss and the wavelength in an
20 optical fiber, that a minimum signal loss is exhibited at a wavelength of 1,550 nm even though an increased dispersion occurs, as compared to that occurring at 1,310 nm. In this connection, the operating wavelength of 1,550 nm could be used by virtue of the development of a new optical amplifier

capable of amplifying the wavelength range of 1,530 nm to 1,565 nm. As a result, a non-repeating long distance transmission has been possible. This has resulted in the advent of a dispersion-shifted fiber (DSF) adapted to shift
5 the zero dispersion from the wavelength of 1,310 nm, at which the zero dispersion is achieved in conventional cases, to the wavelength of 1,550 nm in order to obtain a minimum dispersion and a minimum signal loss.

In addition to such a development of optical fibers, a
10 WDM system has been developed, which serves to multiplex a plurality of optical signals having different wavelengths so as to simultaneously transmit those optical signals through a single optical fiber. Using such a WDM system, it is possible to more rapidly transmit an increased amount of data. An
15 optical communication system using a WDM scheme at a wavelength of 1,550 nm has already been commercially available.

Where the above mentioned DSF is used in such a WDM optical transmission system, however, a signal distortion may
20 occur even though a desired zero dispersion may be achieved. This is because the zero dispersion in the optical fiber may result in a non-linearity of the optical fiber, for example, a four-wave mixing in which lights of different wavelengths may be mixed together, even though a reduced signal distortion is

obtained.

In particular, the most practical method usable in the WDM optical transmission system for a further increase in transmission capacity is to increase the number of channels used. In order to increase the number of channels used, however, it is necessary to use a reduced channel spacing because optical amplifiers use a limited amplification band. Such a reduced channel spacing may result in a more severe problem associated with the non-linearity of the optical fiber such as the four-wave mixing.

The non-linearity of an optical fiber is reduced at an increased channel spacing or an increased dispersion of the optical fiber. However, where the dispersion of the optical fiber increases, a degradation in transmission quality occurs inevitably due to a distortion of optical signals resulting from the increased dispersion.

Therefore, it is necessary to control the dispersion of the optical fiber in order to obtain a maximum transmission capacity of the WDM optical transmission system. In other words, an excessively high dispersion results in an increased signal distortion whereas an excessively low dispersion approximating to the zero dispersion results in a non-linearity of optical signals such as the four-wave mixing phenomenon, thereby generating a signal degradation. In this

regard, it has been strongly required to develop an optical fiber capable of solving both the problem resulting from the dispersion and the problem resulting from the non-linearity.

U.S. Patent No. 5,327,516 issued on July 5, 1994
5 discloses an optical fiber for a WDM system which exhibits a dispersion ranging from 1.5 ps/nm-km to 4 ps/nm-km at a wavelength of 1,550 nm in order to achieve a suppression in non-linearity. The optical fiber disclosed in this patent is called a "non-zero dispersion-shifted fiber (hereinafter,
10 referred to as an "NZ-DSF") in that it is configured to obtain a non-zero dispersion. Such an optical fiber is commercially available from Lucent Technologies In., U.S.A.

The NZ-DSF is significant in that it can suppress the four-wave mixing phenomenon by virtue of its dispersion value
15 ranging from 1.5 ps/nm-km to 4 ps/nm-km. However, where a long-distance transmission is carried out using such an NZ-DSF or an increased number of channels, it is difficult to compensate for a surplus dispersion increased by a dispersion slope on the increased number of channels even though the
20 dispersion accumulated on one channel may be compensated for by use of a dispersion compensation module (DCM) with a high negative dispersion value.

Furthermore, the NZ-DSF exhibits a relatively low dispersion value while having a relatively small effective

area of $55 \mu\text{m}^2$ (in the case of a single-mode optical fiber, it has an effective area of about $80 \mu\text{m}^2$. Since the effective area of the optical fiber is the actual area of an optical signal within the optical fiber, the optical signal has a reduced density for the same optical power as the optical fiber has an increased effective area. At a reduced density of the optical signal, the optical fiber exhibits a relatively reduced non-linearity. In this regard, where a very narrow channel spacing is used, it is difficult to sufficiently suppress the four-wave mixing phenomenon in the NZ-DSF with a relatively small effective area.

In particular, current WDM optical transfer systems show a tendency to use a channel spacing gradually reduced from 200 GHz to 100 GHz, and to 50 GHz. Such a tendency is due to the necessity of an increase in transmission capacity. However, where a very narrow channel spacing of 50 GHz is used, it is difficult for the NZ-DSF to be applied to WDM long-distance optical transmission systems.

Fig. 2a schematically illustrates an example of a WDM optical fiber system using an NZ-DSF. The illustrated optical fiber system, which is denoted by the reference numeral 20, has a channel spacing of 50 GHz and 8 channels. This optical fiber system 20 receives optical power of 0 dBm per channel from a light source. NZ-DSFs 24 are distributed over a total

distance of 480 km. A dispersion-shifted optical fiber (DCF)
25 is also arranged in every span, along with an optical
amplifier 23. The detailed specification of the optical
transfer system 20 illustrated in Fig. 2a is described in the
5 following Table 1.

Table 1

System Specification	Value
Data Transmission Rate	10 Gb/s
Channel Spacing	50 GHz
Optical Power	0 dBm per channel
Number of Channels	8
Total Fiber Optic Cable Length	480 km
Distribution Span Length of Optical Amplifiers	80 km
Optical Fiber Loss	0.2 dB/km

10 The optical transmission system of Fig. 2a mainly
includes eight transmitting terminals 21 respectively adapted
to provide lights of different wavelengths, a plurality of
optical amplifiers 23 each adapted to amplify transmission
light, and a receiving terminal 22 for receiving the
15 transmission light. NZ-DSFs 24 are arranged between the
transmitting terminals 21 and the receiving terminal 22.

Each of the NZ-DSFs 24 used in the optical transmission system of Fig. 2a exhibits an average dispersion of 3.0 ps/nm-km. The average dispersion is a value obtained by dividing a dispersion value accumulated during the transmission of an optical signal by a transmission distance. Each NZ-DSF 24 exhibits an accumulated dispersion value of about 240 ps/nm at a point of 80 km. This accumulated dispersion value is compensated for by a DSF 25 having a dispersion value of - 240 ps/nm.

Fig. 2b is a graph depicting a variation in accumulated dispersion value exhibited when an optical signal is traveled for a distance of 80 km in the optical transmission system of Fig. 2a. Referring to Fig. 2b, it can be found that the accumulated dispersion value increases continuously in a linear fashion as the length of the NZ-DSF increases.

Fig. 3a is an eye diagram of an optical signal transmitted in the optical transmission system illustrated in Fig. 2a. As apparent from Fig. 3a, the eye of the optical signal is unclear, and partially opened. That is, the optical signal is in a severely degraded state. Such a signal degradation is mainly caused by a four-wave mixing phenomenon. Fig. 3b illustrates the optical spectrum of an optical signal transmitted in the optical transmission system of Fig. 2a. Referring to Fig. 3b, it can be found that a signal spectrum

not associated with the transmitted optical signal is generated at portions of the optical signal indicated by the reference numeral 35. Such a signal spectrum is generated due to a four-wave mixing phenomenon. Where a WDM optical transmission system using NZ-DSFs uses a narrow channel spacing of 50 GHz, its transmission quality is severely degraded due to a four-wave mixing phenomenon. This can be found by referring to Fig. 3b.

Meanwhile, Fig. 4b is an eye diagram of an optical signal transmitted in an optical transmission system having the same configuration as that of Fig. 2a, except that optical fibers each having an increased dispersion value of 6 ps/nm-km are used in place of the NZ-DSFs in order to suppress the generation of a non-linearity. Fig. 4b illustrates the optical spectrum of the optical signal. In this case, it is possible to suppress more or less the occurrence of a four-wave mixing phenomenon because the dispersion value of the optical fibers is higher than that of general NZ-DSFs (1.5 to 4 ps/nm-km). As a result, an improvement in signal degradation is obtained, as compared to the case of Fig. 3a. However, the eye of the optical signal is still incompletely opened due to a four-wave mixing phenomenon. In this regard, it can be found, from Fig. 4, that optical fibers exhibit an average dispersion value of 6 ps/nm-km or more so that they

can be used in an optical transmission system having a reduced channel spacing of about 50 GHz.

In the case using conventional NZ-DSFs, therefore, it is impossible to perfectly transmit optical signals due to a four-wave mixing phenomenon occurring when the reduced channel spacing of 50 GHz is used for an increase in transmission capacity. This result causes a limitation on the maximum transmission capacity of the optical transmission system.

In this regard, where a WDM optical transmission system is desired to reduce the channel spacing to 50 GHz for an increase in the transmission capacity per optical fiber, it is important to develop a fiber optic cable having further improvements in dispersion characteristics and suppression characteristics for the four-wave mixing phenomenon, as compared to conventional NZ-DSFs.

Disclosure of Invention

Therefore, an object of the invention is to solve the above mentioned problems involved in the related art, and to provide a fiber optic cable capable of being applied to a WDM optical transmission system using a reduced channel spacing while maximizing the transmission capacity per optical fiber in the WDM optical transmission system.

Another object of the invention is to provide a WDM optical transmission system using the fiber optic cable adapted to accomplish the above mentioned object of the invention, which uses a channel spacing of 50 GHz while having
5 division multiplexing (WDM) optical transmission system including a plurality of connected fibers is formed of a plurality of optical fibers the fiber optic cable.

In optical fibers, wherein each of the connected increased transmission capacity by virtue of the use of
10 optical order to an invention provides a fiber optic cable for a wavelength accomplish this object, in accordance with one aspect, the present respectively exhibiting different dispersion values and different dispersion slopes in a predetermined operating wavelength range while having
15 different lengths and different effective areas, the optical fibers being connected to one another in an optional order.

In accordance with another aspect, the present invention provides a fiber optic cable for a WDM optical transmission system including a plurality of connected optical fibers,
20 wherein each of the connected optical fibers comprises: first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area; and a second optical fiber exhibiting a second dispersion value and

a second dispersion slope in the predetermined operating wavelength range while having a second length and a second effective area; the first and second optical fibers being connected together in an optional order.

5 In accordance with another aspect, the present invention provides a fiber optic cable for a WDM optical transmission system including a plurality of connected optical fibers, wherein each of the connected optical fibers comprises: a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength
10 range while having a first length and a first effective area; a second optical fiber exhibiting a second dispersion value and a second dispersion slope at the predetermined operating wavelength range while having a second length and a second effective area; and a third optical fiber exhibiting the first
15 dispersion value and the first dispersion slope at the predetermined operating wavelength range while having a third length and the first effective area; the first optical fiber, the second optical fiber, and the third optical fiber being
20 connected to one another in this order.

The present invention also provides a WDM optical transmission system having a predetermined channel spacing and a predetermined number of channels, comprising: a transmitting terminal for providing a plurality of optical signals

respectively having different wavelengths; a multiplexer connected to the transmitting terminal and adapted to multiplex the optical signals; a plurality of fiber optic cables each including a plurality of connected optical fibers, each of the connected optical fibers being formed of a plurality of optical fibers respectively exhibiting different dispersion values and different dispersion slopes in a predetermined operating wavelength range while having different lengths and different effective areas, the optical fibers being connected to one another in an optional order; connecting means for interconnecting the fiber optic cables; optical amplifiers for amplifying the optical signal being transmitted through the fiber optic cables; a demultiplexer for demultiplexing the optical signal transmitted through the fiber optic cables; and a receiving terminal connected to the demultiplexer and adapted to receive the demultiplexed optical signal.

In accordance with another aspect, the WDM optical transmission system has a channel spacing of 50 GHz.

In accordance with the present invention, the connected optical fibers, each of which is formed of optical fibers of different kinds connected to one another, exhibit dispersion characteristics capable of sufficiently suppressing the occurrence of a four-wave mixing phenomenon. Thus, the

present invention can provide a WDM optical transmission system having an increased transmission capacity while operating without involving any signal distortion.

In accordance with the present invention, the connected
5 optical fibers of the fiber optic cable are formed by connecting optical fibers, respectively having dispersion values of opposite signs, in an alternating fashion. In accordance with such a connection between optical fibers of different kinds, a high positive accumulated dispersion value
10 is first exhibited during the transmission of an optical signal through the fiber optic cable. By virtue of such a high positive accumulated dispersion value, the occurrence of a four-wave mixing phenomenon is considerably suppressed. The high positive accumulated dispersion value is then rapidly
15 compensated for as the optical fiber having the positive dispersion value is connected to another optical fiber having a negative dispersion value. Such high accumulated dispersion value generating and compensating procedures are repeatedly carried out. By virtue of the compensation for the high
20 accumulated dispersion value, accordingly, a desired average dispersion value is maintained in every fiber optic cable. By virtue of the high accumulated dispersion value repeatedly exhibited during a travel of the optical signal, the occurrence of a four-wave mixing phenomenon is continuously

suppressed.

However, where each of the optical fibers having the same dispersion value has an increased length of 10 km or more, there is a difficulty in the manufacture and
5 installation of the fiber optic cable because the length of the fiber optic cable is 20 km or more. In this connection, the present invention provides a fiber optic cable having an optimum length and an optimum dispersion value capable of suppressing the occurrence of a four-wave mixing phenomenon
10 while allowing a practical manufacture of the fiber optic cable.

Therefore, the fiber optic cable according to the present invention can sufficiently suppress the occurrence of a four-wave mixing phenomenon while exhibiting an average
15 dispersion value equivalent to that of the conventional NZ-DSF.

In addition, the fiber optic cable of the present invention can control the effective area of each optical fiber forming the connected optical fiber. That is, each optical
20 fiber can have an effective area capable of suppressing the occurrence of a four-wave mixing phenomenon. Accordingly, a more effective suppression for the occurrence of a four-wave mixing phenomenon is achieved.

Since the fiber optic cable of the present invention can

remarkably suppress the occurrence of a four-wave mixing phenomenon, it is possible to greatly suppress a degradation in transmission signals in a WDM optical transmission system using a reduced channel spacing for an increase in transmission capacity.

Brief Description of Drawings

The above objects, and other features and advantages of
10 the present invention will become more apparent after a
reading of the following detailed description when taken in
conjunction with the drawings, in which:

Fig. 1 is a graph depicting an optical signal loss depending on the wavelength;

Fig. 2a is a schematic view illustrating an example of a 8-channel WDM optical fiber system using an NZ-DSF while having a channel of 50 GHz;

Fig. 2b is a graph depicting a variation in accumulated dispersion value exhibited in an optical amplifier section of the optical transmission system, shown in Fig. 2a, depending on the optical fiber length;

Figs. 3a and 3b illustrate operation characteristics of the optical transmission system shown in Fig. 2a, in which Fig. 3a is an eye diagram, and Fig. 3b is an optical spectrum

diagram;

Figs. 4a and 4b illustrate operation characteristics of the optical transmission system shown in Fig. 2a when the average dispersion value of the optical transmission system is set to 6 ps/nm-km, in which Fig. 4a is an eye diagram, and
5 Fig. 4b is an optical spectrum diagram;

Fig. 5 is a schematic view illustrating the concept of a 2-section type fiber optic cable according to the present invention;

10 Fig. 6a is a schematic view illustrating an example of a 8-channel WDM optical fiber system having a channel of 50 GHz while using 2-section type fiber optic cables according to the present invention;

Fig. 6b is a graph depicting a variation in accumulated dispersion value exhibited in an optical amplifier section of
15 the optical transmission system, shown in Fig. 6a, depending on the optical fiber length;

Figs. 7a and 7b illustrate operation characteristics of the optical transmission system shown in Fig. 6a, in which
20 Fig. 7a is an eye diagram, and Fig. 7b is an optical spectrum diagram;

Fig. 8 is a graph illustrating a control for the average dispersion in the optical transmission system of Fig. 6a.

Figs. 9a and 9b illustrate operation characteristics of

a 50 GHz optical transmission system using fiber optic cables of the present invention having an effective area of $55 \mu\text{m}^2$, in which Fig. 9a is an eye diagram, and Fig. 9b is an optical spectrum diagram;

5 Fig. 10 is a graph illustrating a control for the effective area in the optical transmission system shown in Fig. 6a;

 Fig. 11 is a graph depicting a control for the occurrence of a four-wave mixing phenomenon in the optical
10 transmission system of Fig. 6a depending on the section length;

 Fig. 12 is a schematic view illustrating the concept of a 3-section type fiber optic cable according to the present invention;

15 Fig. 13a is a schematic view illustrating an example of a 8-channel WDM optical fiber system having a channel of 50 GHz while using 3-section type fiber optic cables according to the present invention;

 Fig. 13b is a graph depicting a variation in accumulated
20 dispersion value exhibited in an optical amplifier section of the optical transmission system, shown in Fig. 13a, depending on the optical fiber length;

 Figs. 14a and 14b illustrate operation characteristics of the optical transmission system shown in Fig. 13a, in which

Fig. 14a is an eye diagram, and Fig. 14b is an optical spectrum diagram; and

Figs. 15a to 15c are schematic view respectively illustrating different connection states of fiber optic cables
5 in accordance with the present invention.

Best Mode for Carrying Out the Invention

Referring to Fig. 5, the concept of a fiber optic cable
10 according to the present invention is illustrated.

In Fig. 5, the fiber optic cable of the present invention is denoted by the reference numeral 41. Although a plurality of connected optical fibers 42 are included in the fiber optic cable 41, only one connected optical fiber 42 is
15 shown for the convenience of description.

The connected optical fiber 42 shown in Fig. 5 is formed by connecting a first optical fiber 43 and a second optical fiber 44 to each other. The connection between the first and second optical fibers 43 and 44 may be achieved at a
20 connection point 45 using a well-known splicing method. Details of the splicing method used in the present invention are disclosed in an article "Optical Fiber Splicing", by Stephen C. Mattler and et al, in "Optical Fiber Telecommunications II: 1988", pp 263-300.

The first and second optical fibers 43 and 44 are of different kinds having different characteristics, respectively. That is, the first and second optical fibers 43 and 44 have different dispersion values, that is, a first dispersion value D_1 and a second dispersion value D_2 , different effective areas, that is, a first effective area A_1 and a second effective area A_2 , and different lengths, that is, a first length l_1 and a second length l_2 , respectively. The first and second optical fibers 43 and 44 also have a first dispersion slope S_1 and a second dispersion slope S_2 .

Since the fiber optic cable 41 including the connected optical fiber 42 is adapted to be used in a WDM optical transmission system, the connected optical fiber 42 should have a dispersion value and an effective area which are required in the WDM optical transmission system. The dispersion value D_{cf} , dispersion slope S_{cf} , length l_{cf} , and effective area A_{cf} of the connected optical fiber 42 may be controlled to correspond to those required in the system by adjusting respective dispersion values and respective effective areas of the first and second optical fibers 43 and 44.

The length l_{cf} of the connected optical fiber 42 corresponds to the sum of the first length l_1 of the first optical fiber 43 and the second length l_2 of the second

optical fiber 44. The average dispersion value D_{cf} of the connected optical fiber 42 is determined by the following Equation 1:

5 [Equation 1]

$$D_{cf}(\lambda) = \frac{D_1(\lambda)l_1 + D_2(\lambda)l_2}{l_1 + l_2}$$

10 As apparent from Equation 1, the dispersion value of the connected optical fiber 42 is adjustable by adjusting respective dispersion values and respective lengths of the first and second optical fibers 43 and 44.

The dispersion slope S_{cf} of the connected optical fiber 42 corresponds to a value obtained by differentiating the dispersion value of the connected optical fiber 42 with
15 respect to wavelength. This dispersion slope S_{cf} can be derived using the following Equation 2:

[Equation 2]

20

$$S_{cf}(\lambda) = \frac{\partial D_{cf}(\lambda)}{\partial \lambda} = \frac{\frac{\partial D_1(\lambda)}{\partial \lambda}l_1 + \frac{\partial D_2(\lambda)}{\partial \lambda}l_2}{l_1 + l_2} = \frac{S_1(\lambda)l_1 + S_2(\lambda)l_2}{l_1 + l_2}$$

Also, the effective area A_{cf} of the connected optical fiber 42 having an influence on a non-linearity of the connected optical fiber 42 can be derived, based on the first and second effective areas of the first and second optical fibers 43 and 44 and respective loss coefficients per length of those optical fibers 43 and 44, using the following Equation 3:

[Equation 3]

$$A_{cf} = \frac{L_1 L_2 - 1}{\frac{\alpha_3}{\alpha_1} \frac{L_1 - 1}{A_1} + \frac{\alpha_3}{\alpha_2} \frac{L_1 (L_2 - 1)}{A_2}}$$

In Equation 3, " α_1 " and " α_2 " represent respective loss indicia (/km) of the first and second optical fibers 43 and 44 and can be expressed by " $\alpha_1 = 0.1 \times a_1 \times \log(10)$ " and " $\alpha_2 = 0.1 \times a_2 \times \log(10)$ ", respectively. " $a_{\{1\}}$ " and " $a_{\{2\}}$ " represent respective loss coefficients (dB/km) of the first and second optical fibers 43 and 44. Also, " α_3 " is expressed by

" $\alpha_3 = \frac{\alpha_1 l_1 + \alpha_2 l_2}{l_1 + l_2}$ ", and " L_1 " and " L_2 " are expressed by " $L_1 = \exp(-$

" $\alpha_1 l_1$)" and " $L_2 = \exp(-\alpha_2 l_2)$ ", respectively.

The dispersion value D_{cf} , dispersion slope S_{cf} , and effective area A_{cf} of the connected optical fiber 42 can be

controlled to correspond to those required in the system by
adjusting respective dispersion values, respective dispersion
slopes, respective effective areas, and respective lengths of
the first and second optical fibers 43 and 44, based on
5 Equations 1, 2, and 3.

The first and second optical fibers 43 and 44 should
have dispersion values of opposite signs because they
compensate for the dispersion value of each other. Typically,
the first optical fiber 43 has a positive dispersion value
10 whereas the second optical fiber 44 has a negative dispersion
value. Of course, the first and second optical fibers 43 and
44 are not limited to the above condition.

As mentioned above, optical fibers having dispersion
values of opposite signs are connected in an alternating
15 fashion to form a connected optical fiber. However, the
resultant connected optical fiber has an average dispersion
value of non-zero so as to suppress the occurrence of a four-
wave mixing phenomenon.

Respective dispersion values of the first and second
20 optical fibers 43 and 44 should be relatively higher than
those in conventional NZ-DSFs. The difference between the
dispersion values of the first and second optical fibers 43
and 44 should also be higher than those in conventional NZ-
DSFs. Preferably, the first and second optical fibers 43 and

44 exhibit a dispersion value difference of 10 ps/nm-km or more.

For the first optical fiber 43, a conventional single-mode optical fiber may be used. This single-mode optical fiber exhibits a positive dispersion value and a relatively large effective area. By virtue of such a single-mode optical fiber, it is possible to reduce the manufacturing costs of the fiber optic cable according to the present invention in that the single-mode optical fiber is commercially available.

Since the first and second optical fibers 43 and 44 have high dispersion values and exhibit a high difference between the dispersion values thereof, they should be connected to each other. In accordance with the currently known techniques, it is difficult to continuously form an optical fiber having portions respectively corresponding to the first and second optical fibers exhibiting a high dispersion value difference, by use of the same preform without involving no connection procedure, but while using a desired refractive index distribution.

Where an optical fiber having portions exhibiting a high dispersion value difference therebetween is manufactured in the same preform, a dispersion shifted region is inevitably formed at the connection between the portions of the optical fiber respectively corresponding to the first and second

optical fiber. Since a reduced dispersion value is exhibited in the dispersion shifted region, four-wave mixing phenomena are generated in an amount larger than an expected amount, thereby resulting in an increased degradation in the performance of the optical transmission system.

Thus, it is difficult to implement a fiber optic cable exhibiting a high dispersion value difference or a sharp variation in dispersion value between portions thereof respectively corresponding to the first and second optical fibers, using the same preform, as in the fiber optic cable according to the present invention. On the other hand, where a fiber optic cable is manufactured by connecting optical fibers exhibiting a high dispersion value difference therebetween in accordance with the present invention, it is unnecessary to separately form a dispersion shifted region between the first and second optical fibers. Accordingly, there is an advantage in that the four-wave mixing phenomenon resulting from the provision of the dispersion shifted region does not occur. It is also possible to obtain a sufficiently high dispersion value difference.

Fig. 5 also schematically illustrate a graph depicting a variation in the accumulated dispersion value of the connected optical fiber 42 depending on the length. This graph is shown below the fiber optic cable 41 in a state

corresponding to the structure of the connected optical fiber 42. The variation in accumulated dispersion value shown in the graph is associated with the case in which the first and second optical fiber 43 and 44 have a positive dispersion value and a negative dispersion value, respectively, while exhibiting a relatively high dispersion value therebetween.

As shown in Fig. 5, the accumulated dispersion value of an optical signal increases gradually as the optical signal travels along the length l_1 of the first optical fiber 43. As mentioned above, the increase in the accumulated dispersion value has a sharp gradient because the dispersion value D_1 of the first optical fiber 43 is high. The accumulated dispersion value increases to a value of " $D_1 l_1$ " when the optical signal reaches the connection point 45 between the first and second optical fiber 43 and 44. As the optical signal begins to travel along the second optical fiber 44 having a high negative dispersion value D_2 , the accumulated dispersion value is gradually reduced by virtue of the second optical fiber 44. The accumulated dispersion value is finally reduced to a value of " $D_1 l_1 + D_2 l_2$ ".

Thus, the accumulated dispersion value of the connected optical fiber in the fiber optic cable 41 is compensated for so as to correspond to an appropriate value as it is abruptly increased by virtue of the first optical fiber 43 having a

high positive dispersion value and then abruptly decreased by virtue of the second optical fiber 44 having a high negative dispersion value. Therefore, although respective dispersion values of the first and second optical fibers 43 and 44 are high, the average value of the connected optical fiber 42 is
5 appropriately maintained in the fiber optic cable 41.

By virtue of such dispersion characteristics of the connected optical fiber 42, the occurrence of a four-wave mixing phenomenon is sufficiently suppressed. That is, a very
10 high accumulated dispersion value is exhibited at a point, corresponding to the length of l_1 , in the fiber optic cable 41 by virtue of the high positive dispersion value D_1 of the first optical fiber 43. This very high accumulated dispersion value serves to sufficiently suppress the occurrence of a
15 four-wave mixing phenomenon. Thus, the fiber optic cable 41 can suppress a non-linearity such as a four-wave mixing in that the connected optical fiber 42 can be adjusted to have an appropriate average dispersion value, and that a high accumulated dispersion value is temporarily exhibited in the
20 fiber optic cable 41 by virtue of the first or second optical fiber 43 or 44 of the connected optical fiber 42.

In accordance with the above mentioned configuration, the dispersion value can be appropriately adjusted to correspond to an appropriate value for every fiber optic

cable. A suppression of a non-linearity phenomenon is also achieved for every fiber optic cable. Accordingly, the whole control of the dispersion value and the four-wave mixing phenomenon can be very easily achieved.

5 The fiber optic cable of Fig. 5 according to the present invention can operate, without any problems, in a WDM optical transmission system using a channel spacing of 50 GHz by virtue of the above mentioned structural advantages. Accordingly, it is possible to achieve an increase in the
10 transmission capacity of the WDM optical transmission system.

Now, the optical transmission system using the fiber optic cable according to the present invention will be described in detail.

Fig. 6a illustrates an example of a 50-GHz WDM optical
15 transmission system using fiber optic cables each having the configuration of Fig. 5. For the comparison with the case using a conventional NZ-DSF, the optical transmission system of Fig. 6a has the same system specification as that of Fig. 2a (refer to Table 1). Accordingly, the fiber optic cables
20 according to the present invention extend in series over a distance of 480 km between the transmitting and receiving terminals. Also, the span length between adjacent optical amplifiers 57 is 80 km, and the loss coefficient of each optical fiber is 0.2 dB/km.

As shown in Fig. 6a, the first optical fiber, which is denoted by the reference numeral 51, exhibits a dispersion value of 17 ps/nm-km, and has a length of 5 km. The second optical fiber, which is denoted by the reference numeral 52, exhibits a dispersion value of -11 ps/nm-km, and has a length of 5 km. Accordingly, the connected optical fiber, which is denoted by the reference numeral 53, has a total length of 10 km. Also, the length of one fiber optic cable is 10 km. Therefore, 8 fiber optic cables are arranged between adjacent optical amplifiers 57.

Fig. 6b illustrates a variation in the accumulated dispersion value of an optical signal exhibited in the optical transmission system of the present invention shown in Fig. 6a, depending on the length of the optical transmission system. An accumulated dispersion value 58 of 85 ps/nm is exhibited at a point of 5 km by the first optical fiber 51. By virtue of this accumulated dispersion value 58, the occurrence of a four-wave mixing phenomenon is suppressed. As the optical signal is further advanced from the point of 5 km, the accumulated dispersion value is gradually reduced from the accumulated dispersion value 58 of 85 ps/nm by the second optical fiber 52 having a negative dispersion value of -11 ps/nm-km. As a result, the accumulated dispersion value is reduced to 30 ps/nm at a point of 10 km. The connected

optical fiber 53 in the first fiber optic cable has an average dispersion value of 3 ps/nm-km.

As shown in Fig. 6b, a high dispersion value is repeatedly exhibited in 8 fiber optic cables arranged in the span length of 80 km. By virtue of such repeated high dispersion values, the occurrence of a four-wave mixing phenomenon is considerably suppressed. Each high dispersion value obtained by the first optical fiber in each fiber optic cable is compensated for by the second optical fiber which is connected to the first optical fiber while having a negative dispersion value. Accordingly, the average dispersion value of each fiber optic cable is the same as the average dispersion value of 3 ps/nm-km in the conventional NZ-DSF.

Where optical fibers of the same kind are used in an optical transmission system using a channel spacing of about 50 GHz for an increase in transmission capacity in accordance with conventional techniques, they should have an average dispersion value of 6 ps/nm-km or more. However, although the fiber optic cable of Fig. 6a according to the present invention has an average dispersion value of 3 ps/nm-km, there is no problem because it uses connected optical fibers each formed of two optical fibers of different kinds connected to each other while having high dispersion values, respectively.

Referring to Figs. 7a and 7b, the operation

characteristics of the WDM optical transmission system using the fiber optic cable according to the present invention are illustrated, respectively.

Fig. 7a illustrates the eye diagram of an optical
5 signal transmitted in the optical transmission system of Fig. 6a. As apparent from Fig. 6a, the eye of the optical signal is clear and greatly opened. That is, there is no degradation of the optical signal caused by a four-wave mixing phenomenon. On the other hand, referring to Fig. 3a, which is the eye
10 diagram of an optical signal transmitted in an optical transmission system using NZ-DSFs, it can be found that the eye of the optical signal is unclear, and the optical signal is in a severely degraded state, as compared to the eye diagram of Fig. 7a using the fiber optic cables according to
15 the present invention.

Fig. 7b is a graph depicting the optical spectrum of the optical signal transmitted in the optical transmission system of Fig. 6a. The portions of the optical spectrum indicated by the arrows 60 in Fig. 7b are indicative of
20 signals generated due to a four-wave mixing phenomenon. Referring to Fig. 7b, it can be found that the four-wave mixing phenomenon is considerably suppressed, as compared to the optical spectrum of Fig. 3b generated in the case using NZ-DSFs.

Fig. 8 is a graph illustrating a control for the average dispersion in the optical transmission system of Fig. 6a. As shown in Fig. 8, the average dispersion is controlled by adjusting the length ratio between the first and second optical fibers 51 and 52 and the negative dispersion value of the second optical fiber 52 under the condition in which the dispersion value of the first optical fiber 51 is set to +17 ps/nm-km.

As apparent from Fig. 8, where the connected optical fiber 53 is desired to have an average dispersion value ranging from 1.5 ps/nm-km to 4 ps/nm-km under the condition in which the first and second optical fibers 51 and 52 have the same length, this can be achieved by appropriately determining the negative dispersion value of the second optical fiber 52 within a range between -14 ps/nm-km and -9 ps/nm-km. Referring to Fig. 8, it can be found that the average dispersion value of the connected optical fiber 53 can be easily controlled by controlling respective lengths of the first and second optical fibers 51 and 52 or respective dispersion values, that is, the positive and negative dispersion values, of the first and second optical fibers 51 and 52.

Meanwhile, referring to the operation characteristics of the optical transmission system of Fig. 6a exhibited under

the condition in which the first and second optical fibers 51 and 52 have an effective area of $55 \mu\text{m}^2$, respectively, it can be found that the occurrence of a four-wave mixing phenomenon is remarkably suppressed, as compared to the case using NZ-DSFs having the same effective area as that of the first and second optical fibers 51 and 52.

Figs. 9a and 9b illustrate the eye diagram and the optical spectrum, respectively, in the case in which the first and second optical fibers 51 and 52 have an effective area of $55 \mu\text{m}^2$, respectively, and thus, the connected optical fiber 53 has an effective area of about $55 \mu\text{m}^2$. Referring to the drawings, in particular, Fig. 9b, it can be found that the occurrence of a four-wave mixing phenomenon is considerably suppressed, as indicated by the arrows 80 in Fig. 9b, as compared to the conventional case using NZ-DSFs (the four-wave mixing phenomenon in the conventional case is indicated by the arrows 35 in Fig. 3b), even though a slightly increased four-wave mixing phenomenon is exhibited as compared to the case in which the first optical fiber 51 has an effective area of $80 \mu\text{m}^2$. This is because the occurrence of a four-wave mixing phenomenon is repeatedly suppressed in the fiber optic cables by virtue of a high accumulated dispersion value of each fiber optic cable.

Now, the suppression of the four-wave mixing phenomenon

achieved by controlling respective effective areas of the optical fibers forming each connected optical fiber in the optical transmission system of Fig. 6a will be described.

Assuming that the first optical fiber 51 has an
5 effective area of $80 \mu\text{m}^2$, and the second optical fiber 52 has
an effective area of $55 \mu\text{m}^2$, the connected optical fiber 53
has an effective area of $66 \mu\text{m}^2$, as calculated using Equation
3. That is, the connected optical fiber 53 of the present
invention has an increased effective area, as compared to the
10 conventional NZ-DSF having an effective area of $55 \mu\text{m}^2$. Since
an increased effective area results in an increased
suppression of the non-linearity of an optical fiber, the
fiber optic cable of the present invention exhibits an
increased suppression of the four-wave mixing phenomenon, and
15 thus, further improved characteristics.

Referring to Figs. 7a and 7b again, the operation
characteristics of the optical transmission system using the
fiber optic cable of the present invention having an increased
effective area of $66 \mu\text{m}^2$ are illustrated, respectively. As
20 apparent from the drawings, in particular, Fig. 7b, optical
spectrum components, indicated by the arrows 60 in Fig. 7b,
resulting from a four-wave mixing phenomenon are in a
remarkably suppressed state, as compared to the optical
spectrum of Fig. 3b exhibited in the NZ-DSF.

Fig. 10 is a graph illustrating a control for the effective area depending on the length ratio between the first and second optical fibers 51 and 52 in the case in which respective effective areas of the first optical fiber 51 are 80 μm^2 and 55 μm^2 , and the loss coefficient of the second optical fiber is set to 0.2 dB/km. As shown in Fig. 6a, where the first and second optical fibers 51 and 52 have a length of 5 km, respectively, and thus, have a length ratio of 1 therebetween, the effective area of the connected optical fiber 53 increases gradually as the fiber optic cable has an increased length. In this case, the connected optical fiber 53 has an effective area of about 66 μm^2 when the fiber optic cable has a length of 10 km. It is also found that when the length ratio between the first and second optical fibers is adjusted to be 0.5 at the same cable length, the effective area of the connected optical fiber 53 is considerably increased to about 71 μm^2 . Thus, the effective area of the connected optical fiber 53 can be easily controlled by adjusting respective lengths or respective effective areas of the first and second optical fibers 51 and 52.

Finally, a description will be made in conjunction with a control for the four-wave mixing phenomenon depending on respective lengths of the first and second optical fibers 51 and 52.

Fig. 11 is a graph depicting the relation between the section length and the four-wave mixing power ratio. Here, the section length corresponds to the length of the first or second optical fiber. For the convenience of description, it is assumed in the case of Fig. 11 that the first and second optical fibers have the same length. Of course, the first and second optical fibers may have different lengths, respectively. In Fig. 11, the graph (1) is associated with the fiber optic cable according to the present invention whereas the graph (2) is associated with the conventional NZ-DSF.

The inventors have found that where the first optical fiber 51 has a dispersion value of 17 ps/nm-km, and the second optical fiber 52 has a dispersion value of -11 ps/nm-km, four-wave mixing components generated in the first optical fiber 51 generate an offset interference at points of 3 km, 6 km, 9 km with a length interval of 3 km while generating a reinforced interference at points of 1.5 km, 4.5 km, 7.5 km with a length interval of 3 km. Four-wave mixing components generated in the second optical fiber 52 generate an offset interference at points of 4.5 km, 9 km, 13.5 km with a length interval of 4.5 km while generating a reinforced interference at points of 6.75 km, 11.25 km with a length interval of 4.5 km. In this case, the four-wave mixing

components generated in the first and second optical fibers 51 and 52 generate a reinforced interference at a point of about 7 km while maintaining both the offset interference and the reinforced interference in certain magnitudes, respectively, in the span from the point of 3 km to the point of 6 km. As a result, only the relatively low four-wave mixing components are left. Fig. 11 shows the fact that in the optical transmission system using the fiber optic cable according to the present invention, a high signal-to-four-wave mixing power ratio is exhibited when the fiber optic cable has a section length of 3 to 6 km.

Referring to Fig. 11, it can also be found that the signal-to-four-wave mixing power ratio in the optical transmission system of the present invention increases at a section length exceeding 7 km, as compared to the case in which the section length ranges from 3 km to 6 km. In spite of such an increase in the signal-to-four-wave mixing power ratio, the four-wave mixing phenomenon is considerably suppressed, as compared to the conventional NZ-DSF. This can be found by referring to Fig. 11.

It is also found, by referring to Fig. 11, that an improvement in the signal-to-four-wave mixing power ratio is exhibited again in the optical transmission system of the present invention when the section length exceeds 10 km. Such

a method of improving the signal-to-four-wave mixing power ratio is disclosed in an article by Tkach et al, in "Journal of Lightwave Technology", pp 263-300, Volume 13, 1995. Disclosed in this article is use of the combination of a
5 single-mode optical fiber having a length of 8.4 km and a dispersion-shifted optical fiber having a length of 48 km to suppress the occurrence of a four-wave mixing phenomenon. In the article, Tkach et al pointed out that a satisfied phase matching condition is established at a short section length,
10 thereby resulting in an increased four-wave mixing phenomenon. For this reason, in this method, its application to the cases using a short section length is substantially excluded.

However, the method disclosed in the article is impractical because it is difficult to manufacture a fiber
15 optic cable having an excessively increased section length, as described in the article, and to handle the fiber optic cable. Practically, it is unusual to manufacture a fiber optic cable having a length of 15 km or more. Typically, the section length is set to about 7 km or less.

20 Taking into consideration the actual problems associated with the manufacture and installation of fiber optic cables, the inventors has found that even in the case of a fiber optic cable having a length of 10 km, it is possible to considerably suppress the occurrence of a four-wave mixing

phenomenon by controlling the section length and respective dispersion values of the first and second optical fibers, as shown in Fig. 11.

5 The fact that the occurrence of a four-wave mixing phenomenon can be controlled, depending on respective length of the first and second optical fibers, in the optical transmission system according to the present invention can be understood by referring to Fig. 11. As shown in Fig. 11, an appropriate length of the fiber optic cable used in the
10 optical transmission system of the present invention is about 6 to 12 km in the case in which the connected optical fiber of the fiber optic cable is formed of two optical fibers of different kinds connected to each other. Where two fiber optic cables are connected to each other in order to form a
15 connected fiber optic cable, the length of each fiber optic cable may have a length of 3 to 6 km. This means that the length of the fiber optic cable may be reduced to a length of 3 to 6 km.

The following Table 2 describes respective optimum
20 dispersion values, respective optimum dispersion slopes, and respective optimum effective areas of the first and second optical fibers practically determined in the case in which the fiber optic cable of the present invention is used in an optical transmission system with the configuration of Fig. 6a.

Table 2

Characteristics	First Optical Fiber	Second Optical Fiber
Dispersion Value	17 ps/nm-km	-11 ps/nm-km
Dispersion Slope	0.08 ps/nm ² -km	-0.08 ps/nm ² -km
Effective Area	80 μm^2	55 μm^2
Section Length	3 to 6 km	3 to 6 km

The dispersion value, dispersion slope, and effective
5 area of the second optical fiber in Table 2 are those derived
under the condition in which a conventional single-mode
optical fiber having a relatively high positive dispersion
value and a large effective area is used for the first optical
fiber. Where such a single-mode optical fiber is used for the
10 first optical fiber, it is possible to easily obtain
dispersion characteristics and an effective area which are
required in the present invention. It is also possible to
reduce the manufacturing costs of the fiber optic cable
according to the present invention. In addition, there is an
15 advantage in that the manufacture of the fiber optic cable is
easily achieved.

The above values of the second optical fiber are values
which can be practically provided by the second optical fiber,
sufficiently taking into consideration the problems possibly
20 involved in the case wherein the second optical fiber is
practically manufactured.

5

10

15

20

optical fiber configured by connecting first and second optical fibers of different kinds to each other in the same optical cable, can be applied to a WDM optical transmission system using a channel spacing of 50 GHz by controlling the dispersion value, dispersion slope, and effective area of the
5 connected optical fiber to correspond to those allowed in the WDM optical transmission system in accordance with an adjustment for respective dispersion values, respective lengths, and respective effective areas of the first and
10 second optical fibers forming the connected optical fiber. Accordingly, the fiber optic cable and optical transmission system according to the present invention provide an effect of maximizing the transmission capacity per optical fiber.

The above mentioned fiber optic cable of the present invention may be referred to as a "2-section type fiber optic
15 cable" in that it is configured by connecting one first optical fiber and one second optical fiber to each other. Now, a description will be made in conjunction with a 3-section type fiber optic cable including a connection optical
20 fiber formed of three optical fibers connected together, and an optical transmission system using the 3-section type fiber optic cable.

Referring to Fig. 12, the concept of a 3-section type fiber optic cable according to the present invention is

illustrated. This 3-section type fiber optic cable is similar to the 2-section type fiber optic cable shown in Fig. 5, except for an addition of a third optical fiber 115 which has the same dispersion value, dispersion slope, and effective area as those of the first optical fiber denoted by the reference numeral 113 while having a length different from that of the first optical fiber 113. Accordingly, respective dispersion values, respective dispersion slopes, respective lengths, and respective effective areas of the first and second optical fibers 113 and 114 in the 3-section type fiber optic cable may be represented by the same characters as those for the 2-section type fiber optic cable. The dispersion value, dispersion slope, length, and effective area of the third optical fiber 115 may be represented by "D₁", "S₁", "l₃", and "A₁", respectively.

The average dispersion value, dispersion slope, and effective area of the connected optical fiber 112 in the 3-section type fiber optic cable can be determined by the following Equations 4, 5, and 6, respectively:

[Equation 4]

$$D_{ef}(\lambda) = \frac{D_1(\lambda)l_1 + D_2(\lambda)l_2 + D_1(\lambda)l_3}{l_1 + l_2 + l_3}$$

[Equation 5]

$$S_{ef}(\lambda) = \frac{\partial D_{ef}(\lambda)}{\partial \lambda} = \frac{\frac{\partial D_1(\lambda)}{\partial \lambda} l_1 + \frac{\partial D_2(\lambda)}{\partial \lambda} l_2 + \frac{\partial D_3(\lambda)}{\partial \lambda} l_3}{l_1 + l_2 + l_3} = \frac{S_1(\lambda) l_1 + S_2(\lambda) l_2 + S_3(\lambda) l_3}{l_1 + l_2 + l_3}$$

5 [Equation 6]

$$A_{ef} = \frac{\frac{L_1 L_2 L_3 - 1}{\alpha_1} + \frac{\alpha_3 (L_1 - L_1 L_2 + L_1 L_2 L_3 - 1)}{A_1} + \frac{\alpha_3 L_1 (L_2 - 1)}{\alpha_2 A_2}}{\alpha_1}$$

In Equation 6, " α_1 " and " α_2 " represent respective loss
 10 indicia (/km) of the first and second optical fibers 113 and
 114 and can be expressed by " $\alpha_1 = 0.1 \times a_1 \times \log(10)$ " and " $\alpha_2 =$
 0.1 $\times a_2 \times \log(10)$ ", respectively. " $a_{\{1\}}$ " and " $a_{\{2\}}$ "
 represent respective loss coefficients (dB/km) of the first
 and second optical fibers 113 and 114. Also, " α_3 " is
 15 expressed by " $\alpha_3 = \frac{\alpha_1 l_1 + \alpha_2 l_2 + \alpha_3 l_3}{l_1 + l_2 + l_3}$ (/km)", and " L_1 " and " L_2 " are
 expressed by " $L_1 = \exp(-\alpha_1 l_1)$ ", " $L_2 = \exp(-\alpha_2 l_2)$ " and " $L_3 =$
 $\exp(-\alpha_1 l_3)$ ", respectively.

As apparent from the above Equations 4, 5, and 6, the
 dispersion value D_{cf} , dispersion slope S_{cf} , and effective area

A_{cf} of the connected optical fiber 112 are controlled, based on respective dispersion characteristics, respective lengths, and respective effective areas of the first, second, and third optical fibers 113, 114, and 115.

5 The average dispersion value of the connected optical
fiber 112 determined by Equation 4 is designed to always have
a non-zero value.

Fig. 12 illustrate a graph depicting a variation in the accumulated dispersion value of the connected optical fiber 112 in the fiber optic cable 110 depending on the length. In the fiber optic cable 110 of Fig. 12, the first optical fiber 113 is designed to have a positive dispersion value whereas the second optical fiber 114 is designed to have a negative dispersion value, for the convenience of description. Of course, the first and second optical fibers 113 and 114 are not limited to the above condition.

As shown in Fig. 12, the accumulated dispersion value of the connected optical fiber 112 increases gradually by virtue of the first optical fiber 113 having a high positive dispersion value. This increase of the accumulated dispersion value is continued over the length l_1 of the first optical fiber 113, so that the resultant accumulated dispersion value corresponds to a value of " $D_1 l_1$ ". By virtue of such a high accumulated dispersion value, it is possible to very

efficiently suppress the occurrence of a four-wave mixing phenomenon in the optical cable 110. Thereafter, a compensation for the accumulated dispersion value " $D_1 l_1$ " is begun by the second optical fiber 114 having a high negative dispersion value. As a result, the accumulated dispersion value has a negative value at a point, corresponding to a length of " $l_1 + l_2$ ", where the second optical fiber 114 terminates. From this point, the accumulated dispersion value is increased to have a positive value by the third optical fiber 115 having a high positive dispersion value.

As apparent from the above description, the occurrence of a four-wave mixing phenomenon is considerably suppressed by virtue of a high accumulated dispersion value generated during the travel of an optical signal in the fiber optic cable 110, and an average dispersion value of the connected optical fiber 112 maintained to be low. Therefore, the 3-section type fiber optic cable 110 can control both the dispersion value and non-linearity of the connected optical fiber 112.

Fig. 13a schematically illustrates an example of a WDM optical transmission system using 3-section fiber optic cables each having the configuration of Fig. 12. For an easy comparison with the case using NZ-DSFs and the case using 2-section type fiber optic cables, the optical transmission system of Fig. 13a has the same system specification as that

described in Table 1.

As shown in Fig. 13a, the first optical fiber, which is denoted by the reference numeral 122, exhibits a dispersion value of +17 ps/nm-km, and has a length of 2.5 km and an effective area of 80 μm^2 . The second optical fiber, which is denoted by the reference numeral 123, exhibits a dispersion value of -11 ps/nm-km, and has a length of 5 km and an effective area of 55 μm^2 . The third optical fiber, which is denoted by the reference numeral 124, exhibits a dispersion value of +17 ps/nm-km, and has a length of 2.5 km. Although the third optical fiber 124 is designed to have the same dispersion value and length as those of the first optical fiber 122 in the case of Fig. 13a, it may have values different from those of the first optical fiber 122.

Fig. 13b illustrates a variation in dispersion value exhibited in the optical transmission system using 3-section type fiber optic cables each having the above mentioned configuration. In this optical transmission system, an average dispersion value of 3 ps/nm-km is maintained for each fiber optic cable. A high accumulated dispersion value 125 is also repeatedly exhibited in the fiber optic cables, as in the 2-section type fiber optic cables. By virtue of such a low average dispersion value and such a high accumulated dispersion value, the occurrence of a four-wave mixing

phenomenon is sufficiently suppressed in each fiber optic cable.

The operation characteristics of the optical transmission system of Fig. 13a are depicted by an eye diagram of Fig. 14 and an optical signal spectrum of Fig. 14b, respectively. Referring to Figs. 14a and 14b, it can be found that even in a 50 GHz optical transmission system, the occurrence of a four-wave mixing phenomenon is sufficiently suppressed, and the eye of an optical signal is clearly opened. That is, a considerable improvement in system performance is obtained in this optical transmission system, as compared to a 50 GHz optical transmission system using conventional NZ-DSFs.

As apparent from the above description, where a WDM optical transmission system is implemented using fiber optic cables according to the present invention, which may be either the 2-section type optical cables or the 3-section type optical cables, it can have system operation characteristics considerably improved over those of a WDM optical transmission system using convention NZ-DSFs.

There is only a difference between the systems respectively using the 2-section type optical cables and the 3-section type optical cables in that the 2-section type optical cable has one connection point whereas the 3-section

type optical cable has two connection points. Taking only the connection loss into consideration, the system using the 2-section type optical cables may be more advantageous.

5 The 2-section type optical cable and the 3-section type optical cable may have a characteristic difference therebetween because they use different arrangements of optical fibers forming respective connected optical fibers thereof.

10 Referring to Figs. 15a and 15b, the cases in which 2-section type fiber optic cables are connected to each other are illustrated, respectively. In the case of Fig. 15a, the connection of the 2-section type fiber optic cables is carried out in such a fashion that optical fibers of different kinds are connected to each other. That is, in accordance with the connection of Fig. 15a, a fiber optic cable 130 having an optical fiber arrangement of a first optical fiber 130' and a second optical fiber 132 arranged in this order is connected with another fiber optic cable 131 having the same optical fiber arrangement as the fiber optic cable 130. In the case of Fig. 15b, the connection of the 2-section type fiber optic cables is carried out in such a fashion that optical fibers of the same kind are connected to each other. That is, in accordance with the connection of Fig. 15b, the fiber optic cable 130 having an optical fiber arrangement of the first

optical fiber 131 and the second optical fiber 132 arranged in this order is connected with another fiber optic cable 130" having an optical fiber arrangement of the second optical fiber 132 and the first optical fiber 131 arranged in this
5 order. In this case, the length of the second optical fiber 132 is doubled when viewed in the entire fiber optic cable of the connected state.

The doubled length of the second optical fiber makes it possible to correspondingly reduce the cable length. Where
10 the first and second optical fibers have a length of 3 km, respectively, as described in Table 2, the resultant fiber optic cable should have a length of 6 km. However, where respective second optical fibers 132 of adjacent fiber optic cables are connected to each other, as in the case of Fig.
15 15b, the length of 3 km required for each second optical fiber in the entire connected fiber optic cable can be obtained using second optical fibers 132 each having a length of 1.5 km. Therefore, it is possible to manufacture fiber optic cables each having a length of 3 km. Also, the connection
20 between optical fibers of the same kind provides an advantage in that the connection between fiber optic cables can be easily made.

On the other hand, the connection of 3-section type fiber optic cables is carried out only in such a fashion that

optical fibers of the same kind are connected to each other. As shown in Fig. 15c, the connection of adjacent fiber optic cables is carried out in such a fashion that the third or first optical fiber 135 or 133 of one fiber optic cable 136 is
5 connected to the third or first optical fiber 135 or 133 of another fiber optic cable 136' adjacent to the fiber optic cable 136. Such a connection between optical fibers of the same kind provides an advantage in that the connection between fiber optic cables in a practical cable installation can be
10 easily made.

Thus, it is possible to maximize the advantages of the configuration according to the present invention by appropriately determining the arrangement of optical fibers required to control the dispersion characteristics of the
15 connected optical fiber in each fiber optic cable, and the arrangement of those optical fibers required for an easy connection between fiber optic cables and a reduction in the length of each fiber optic cable.

20 Industrial Applicability

As apparent from the above description, the present invention provides a fiber optic cable which includes a connected optical fiber formed by connecting optical fibers of

different kinds having different characteristics to each other in the same fiber optic cable while having a dispersion value, an effective area, and a dispersion slope controlled to correspond to those required in an optical transmission system in accordance with an adjustment for respective dispersion values, respective lengths, respective effective areas, and respective dispersion slopes of those optical fibers. The total length of the connected optical fibers of the same kind in the connected fiber optic cable is adjustable so as to further suppress a non-linearity of the optical fibers. The fiber optic cable of the present invention can be easily designed to have optimum dispersion characteristics and an optimum effective area required in a WDM optical transmission system having a channel spacing of 50 GHz. Since this design can be made for unit cables, it is easy and provides an improved accuracy, as compared to the case in which a design is made for the entire fiber optic cable.

Although the present invention has been described in conjunction with 2-section type fiber optic cables and 3-section type fiber optic cables, they are exemplified only for the convenience of description. Accordingly, the configuration according to the present invention is not limited to such types of fiber optic cables. The system specification and the dispersion characteristics and effective

areas of optical fibers specifically defined in the above description are intended only for the convenience of description, and are not to be construed to limit the present invention.

5 For the optical fibers intended to be used the present invention, conventional optical fibers may be used. However, the optical fibers of the present invention are not limited to those conventional optical fibers. Any optical fibers including optical fibers newly developed may be used in so far
10 as they meet objects and applications of the present invention.

 Although the preferred embodiments of the invention have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and
15 substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

WHAT IS CLAIMED IS:

1. A fiber optic cable for a wavelength division multiplexing (WDM) optical transmission system including a plurality of connected optical fibers, wherein each of the connected optical fibers is formed of a plurality of optical fibers respectively exhibiting different dispersion values and different dispersion slopes in a predetermined operating wavelength range while having different lengths and different effective areas, the optical fibers being connected to one another in an optional order.

2. The fiber optic cable according to claim 1, wherein the different dispersion values and different lengths of the optical fibers in each of the connected optical fibers are controlled so that the connected optical fiber has an average dispersion value corresponding to a value required in the WDM optical transmission system.

3. The fiber optic cable according to claim 1, wherein the different dispersion values, different slopes, and different lengths of the optical fibers in each of the connected optical fibers are controlled so that the connected optical fiber has an average dispersion slope corresponding to

a value required in the WDM optical transmission system.

4. The fiber optic cable according to claim 1, wherein the different effective areas and different lengths of the optical fibers in each of the connected optical fibers are controlled so that the connected optical fiber has an average effective area corresponding to a value required in the WDM optical transmission system.

10 5. The fiber optic cable according to any one of claims
1 to 4, wherein at least a part of the different dispersion
values are +2 ps/nm-km or more, and at least the other part of
the different dispersion values are -2 ps/nm-km or less.

15 6. The fiber optic cable according to claim 5, wherein
the optical fibers of each of the connected optical fibers are
connected to one another in such a fashion that adjacent ones
of the optical fibers have dispersion values of opposite
signs, respectively, while exhibiting a dispersion value
20 difference of at least 10 ps/nm-km therebetween.

7. The fiber optic cable according to any one of claims 1 to 4, wherein each of the connected optical fibers has a length of 0.5 to 20 km.

8. A fiber optic cable for a wavelength division multiplexing (WDM) optical transmission system including a plurality of connected optical fibers, wherein each of the
5 connected optical fibers comprises:

a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area; and

10 a second optical fiber exhibiting a second dispersion value and a second dispersion slope in the predetermined operating wavelength range while having a second length and a second effective area;

the first and second optical fibers being connected
15 together in an optional order.

9. The fiber optic cable according to claim 8, wherein the first dispersion value and first length of the first optical fiber and the second dispersion value and second
20 length of the second optical fiber are controlled so that an associated one of the connected optical fibers has an average dispersion value corresponding to a value required in the WDM optical transmission system.

10. The fiber optic cable according to claim 8, wherein the first dispersion value, first dispersion slope, and first length of the first optical fiber and the second dispersion value, second dispersion slope, and second length of the second optical fiber are controlled so that an associated one of the connected optical fibers has a dispersion value corresponding to a value required in the WDM optical transmission system.

11. The fiber optic cable according to claim 8, wherein the first length and first effective area of the first optical fiber and the second length and second effective area of the second optical fiber are controlled so that an associated one of the connected optical fibers has an effective area corresponding to a value required in the WDM optical transmission system.

12. The fiber optic cable according to claim 9, wherein the first dispersion value of the first optical fiber, the second dispersion value of the second optical fiber, and the average dispersion value of the associated connected optical fiber are function of an operating wavelength (λ), and the average dispersion value of the connected optical fiber is determined by the following equation:

$$D_{cf}(\lambda) = \frac{D_1(\lambda)l_1 + D_2(\lambda)l_2}{l_1 + l_2}$$

In the equation,

5 "D_{cf}" represents the average dispersion value (ps/nm-km) of the connected optical fiber;

"D₁" represents the first dispersion value (ps/nm-km) of the first optical fiber;

10 "D₂" represents the second dispersion value (ps/nm-km) of the first optical fiber;

"l₁" represents the first length (km) of the first optical fiber; and

"l₂" represents the second length (km) of the second optical fiber.

15

13. The fiber optic cable according to claim 10, wherein the first dispersion value and first dispersion slope of the first optical fiber, the second dispersion value and second dispersion slope of the second optical fiber, and the dispersion value and dispersion slope of an associated one of the connected optical fibers are function of an operating wavelength (λ), and the dispersion value of the connected optical fiber is determined by the following equation:

20

$$S_{cf}(\lambda) = \frac{\partial D_{cf}(\lambda)}{\partial \lambda} = \frac{\frac{\partial D_1(\lambda)}{\partial \lambda} l_1 + \frac{\partial D_2(\lambda)}{\partial \lambda} l_2}{l_1 + l_2} = \frac{S_1(\lambda) l_1 + S_2(\lambda) l_2}{l_1 + l_2}$$

In the equation,

5 "S_{cf}" represents the dispersion slope (ps/nm²-km) of the connected optical fiber;

"D_{cf}" represents the average dispersion value (ps/nm-km) of the connected optical fiber;

10 "D₁" represents the first dispersion value (ps/nm-km) of the first optical fiber;

"D₂" represents the second dispersion value (ps/nm-km) of the first optical fiber;

"S₁" represents the first dispersion slope (ps/nm²-km) of the first optical fiber;

15 "S₂" represents the second dispersion slope (ps/nm²-km) of the second optical fiber;

"l₁" represents the first length (km) of the first optical fiber; and

20 "l₂" represents the second length (km) of the second optical fiber.

14. The fiber optic cable according to claim 11, wherein the effective area of the connected optical fiber is

determined by the following equation:

$$A_{ef} = \frac{L_1 L_2 - 1}{\frac{\alpha_3}{\alpha_1} \frac{L_1 - 1}{A_1} + \frac{\alpha_3}{\alpha_2} \frac{L_1 (L_2 - 1)}{A_2}}$$

5 In the equation,

"A_{cf}" represents the effective area (μm²) of the connected optical fiber;

"l₁" represents the first length (km) of the first optical fiber;

10 "l₂" represents the second length (km) of the second optical fiber;

"α₁" represents a loss index (/km) of the first optical fiber;

15 "α₂" represents a loss index (/km) of the second optical fiber;

"α₃" is expressed by " $\alpha_3 = \frac{\alpha_1 l_1 + \alpha_2 l_2}{l_1 + l_2}$ ";

"α₁" is expressed by " $\alpha_1 = 0.1 \times a_1 \times \log(10)$ ";

"α₂" is expressed by " $\alpha_2 = 0.1 \times a_2 \times \log(10)$ ";

20 "a_{1}" represents a loss coefficient (dB/km) of the first optical fiber;

"a_{2}" represents a loss coefficient (dB/km) of the second optical fiber;

"L1" is expressed by " $L_1 = \exp(-\alpha_1 l_1)$ "; and

"L2" is expressed by " $L_2 = \exp(-\alpha_2 l_2)$ ".

15 15. The fiber optic cable according to any one of claims
8 to 14, wherein the first and second dispersion values have
opposite signs, respectively, while exhibiting a difference of
at least 10 ps/nm-km therebetween.

10 16. The fiber optic cable according to any one of claims
8 to 14, wherein the first dispersion slope has a positive
value, and the second dispersion slope has a negative value.

15 17. The fiber optic cable according to any one of claims
8 to 14, wherein the first and second dispersion slopes have
positive values, respectively.

20 18. The fiber optic cable according to any one of claims
8 to 14, wherein the first dispersion value of the first
optical fiber ranges from +4 ps/nm-km to +20 ps/nm-km at a
central wavelength in the operating wavelength range, and the
second dispersion value of the second optical fiber ranges
from -20 ps/nm-km to -4 ps/nm-km at the central wavelength in
the operating wavelength range.

19. The fiber optic cable according to claim 18, wherein the first dispersion value ranges from 15 ps/nm-km to 18 ps/nm-km, and the second dispersion value ranges from -12 ps/nm-km to -9 ps/nm-km.

5

20. The fiber optic cable according to any one of claims 8 to 14, wherein the first dispersion slope has a value of +0.1 ps/nm²-km or less, and the second dispersion slope has a value of -0.1 ps/nm²-km.

10

21. The fiber optic cable according to any one of claims 8 to 14, wherein the first and second dispersion slopes have values of +0.1 ps/nm²-km or less, respectively.

15

22. The fiber optic cable according to any one of claims 8 to 14, wherein the first effective area ranges from 50 μm^2 to 90 μm^2 , and the second effective area ranges from 30 μm^2 to 80 μm^2 .

20

23. The fiber optic cable according to claim 19, wherein the first and second lengths of the first and second optical fibers range from 3 km to 6 km, respectively.

24. The fiber optic cable according to any one of claims

8 to 14, wherein the first and second optical fibers exhibit a dispersion value of 0 in a wavelength range of 1,300 to 1,550 nm.

5 25. The fiber optic cable according to any one of claims 8 to 14, wherein the first optical fiber exhibits a dispersion value of 0 in a wavelength range of 1,300 to 1,500 nm, and the second optical fiber exhibits a dispersion value of 0 at a wavelength of 1,600 nm or more.

10

26. A fiber optic cable for a wavelength division multiplexing (WDM) optical transmission system including a plurality of connected optical fibers, wherein each of the connected optical fibers comprises:

15 a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area;

20 a second optical fiber exhibiting a second dispersion value and a second dispersion slope at the predetermined operating wavelength range while having a second length and a second effective area; and

 a third optical fiber exhibiting the first dispersion value and the first dispersion slope at the predetermined

operating wavelength range while having a third length and the first effective area;

the first optical fiber, the second optical fiber, and the third optical fiber being connected to one another in this order.

27. The fiber optic cable according to claim 26, wherein the first dispersion value and first length of the first optical fiber, the second dispersion value and second length of the second optical fiber, and the first dispersion value and third length of the third optical fiber are controlled so that an associated one of the connected optical fibers has an average dispersion value corresponding to a value required in the WDM optical transmission system.

28. The fiber optic cable according to claim 26, wherein the first dispersion value, first dispersion slope, and first length of the first optical fiber, the second dispersion value, second dispersion slope, and second length of the second optical fiber, and the first dispersion value, first dispersion slope, and third length of the third optical fiber are controlled so that an associated one of the connected optical fibers has a dispersion value corresponding to a value required in the WDM optical transmission system.

29. The fiber optic cable according to claim 26, wherein the first length and first effective area of the first optical fiber, the second length and second effective area of the second optical fiber, and the third length and first effective area of the third optical fiber are controlled so that an associated one of the connected optical fibers has an effective area corresponding to a value required in the WDM optical transmission system.

30. The fiber optic cable according to claim 27, wherein the first dispersion value of the first and third optical fibers, the second dispersion value of the second optical fiber, and the average dispersion value of the associated connected optical fiber are function of an operating wavelength (λ), and the average dispersion value of the connected optical fiber is determined by the following equation:

$$D_{cf}(\lambda) = \frac{D_1(\lambda)l_1 + D_2(\lambda)l_2 + D_3(\lambda)l_3}{l_1 + l_2 + l_3}$$

In the equation,

" D_{cf} " represents the average dispersion value (ps/nm-km)

of the connected optical fiber;

"D₁" represents the first dispersion value (ps/nm-km) of the first optical fiber;

5 "D₂" represents the second dispersion value (ps/nm-km) of the first optical fiber;

"l₁" represents the first length (km) of the first optical fiber;

"l₂" represents the second length (km) of the second optical fiber; and

10 "l₃" represents the third length (km) of the third optical fiber.

31. The fiber optic cable according to claim 28, wherein the first dispersion value and first dispersion slope of the first and third optical fibers, the second dispersion value and second dispersion slope of the second optical fiber, and the average dispersion value and dispersion slope of an associated one of the connected optical fibers are function of an operating wavelength (λ), and the dispersion value of the connected optical fiber is determined by the following equation:

15

20

$$S_{ef}(\lambda) = \frac{\partial D_{ef}(\lambda)}{\partial \lambda} = \frac{\frac{\partial D_1(\lambda)}{\partial \lambda} l_1 + \frac{\partial D_2(\lambda)}{\partial \lambda} l_2 + \frac{\partial D_3(\lambda)}{\partial \lambda} l_3}{l_1 + l_2 + l_3} = \frac{S_1(\lambda) l_1 + S_2(\lambda) l_2 + S_3(\lambda) l_3}{l_1 + l_2 + l_3}$$

In the equation,

" S_{cf} " represents the dispersion slope ($\text{ps}/\text{nm}^2\text{-km}$) of the connected optical fiber;

5 "D_{cf}" represents the average dispersion value ($\text{ps}/\text{nm-km}$) of the connected optical fiber;

"D₁" represents the first dispersion value ($\text{ps}/\text{nm-km}$) of the first optical fiber;

"D₂" represents the second dispersion value ($\text{ps}/\text{nm-km}$) of the first optical fiber;

10 "l₁" represents the first length (km) of the first optical fiber;

"l₂" represents the second length (km) of the second optical fiber.

15 "l₃" represents the third length (km) of the third optical fiber.

"S₁" represents the first dispersion slope ($\text{ps}/\text{nm}^2\text{-km}$) of the first optical fiber; and

"S₂" represents the second dispersion slope ($\text{ps}/\text{nm}^2\text{-km}$) of the second optical fiber.

20

32. The fiber optic cable according to claim 29, wherein the effective area of the connected optical fiber is determined by the following equation:

$$A_{cf} = \frac{L_1 L_2 L_3 - 1}{\frac{\alpha_3 (L_1 - L_1 L_2 + L_1 L_2 L_3 - 1)}{\alpha_1 A_1} + \frac{\alpha_3 L_1 (L_2 - 1)}{\alpha_2 A_2}}$$

In the equation,

"A_{cf}" represents the effective area (μm²) of the connected optical fiber;

5 "l₁" represents the first length (km) of the first optical fiber;

"l₂" represents the second length (km) of the second optical fiber;

10 "l₃" represents the third length (km) of the third optical fiber;

"α₁" represents a loss index (/km) of the first optical fiber;

"α₂" represents a loss index (/km) of the second optical fiber;

15 "α₃" is expressed by "α₃ = $\frac{\alpha_1 l_1 + \alpha_2 l_2 + \alpha_1 l_3}{l_1 + l_2 + l_3}$ (/km)";

"α₁" is expressed by "α₁ = 0.1 x a₁ x log(10)";

"α₂" is expressed by "α₂ = 0.1 x a₂ x log(10)";

"a_{1}" represents a loss coefficient (dB/km) of the first optical fiber;

20 "a_{2}" represents a loss coefficient (dB/km) of the second optical fiber;

"L1" is expressed by " $L_1 = \exp(-\alpha_1 l_1)$ ";

"L2" is expressed by " $L_2 = \exp(-\alpha_2 l_2)$ "; and

"L3" is expressed by " $L_3 = \exp(-\alpha_1 l_3)$ ".

5 33. The fiber optic cable according to any one of claims
26 to 32, wherein the first and second dispersion values have
opposite signs, respectively, while exhibiting a difference of
at least 10 ps/nm-km therebetween.

10 34. The fiber optic cable according to any one of claims
26 to 32, wherein the first dispersion slope has a positive
value, and the second dispersion slope has a negative value.

 35. The fiber optic cable according to any one of claims
15 26 to 32, wherein the first and second dispersion slopes have
positive values, respectively.

 36. The fiber optic cable according to any one of claims
26 to 32, wherein the first dispersion value of the first
20 optical fiber ranges from +4 ps/nm-km to +20 ps/nm-km at a
central wavelength in the operating wavelength range, and the
second dispersion value of the second optical fiber ranges
from -20 ps/nm-km to -4 ps/nm-km at the central wavelength in
the operating wavelength range.

37. The fiber optic cable according to claim 36, wherein the first dispersion value ranges from 15 ps/nm-km to 18 ps/nm-km, and , and the second dispersion value ranges from -12 ps/nm-km to -9 ps/nm-km.

5

38. The fiber optic cable according to any one of claims 26 to 32, wherein the first dispersion slope has a value of +0.1 ps/nm²-km or less, and the second dispersion slope has a value of -0.1 ps/nm²-km.

10

39. The fiber optic cable according to any one of claims 26 to 32, wherein the first and second dispersion slopes have values of +0.1 ps/nm²-km or less, respectively.

15

40. The fiber optic cable according to any one of claims 26 to 32, wherein the first effective area ranges from 50 μm^2 to 90 μm^2 , and the second effective area ranges from 30 μm^2 to 80 μm^2 .

20

41. The fiber optic cable according to claim 37, wherein the first, second, and third lengths range from 3 km to 6 km, respectively.

42. The fiber optic cable according to any one of claims

26 to 32, wherein the first, second, and third optical fibers exhibit a dispersion value of 0 in a wavelength range of 1,300 to 1,500 nm.

5 43. The fiber optic cable according to any one of claims 26 to 32; wherein the first optical fiber exhibits a dispersion value of 0 in a wavelength range of 1,300 to 1,500 nm, and the second optical fiber exhibits a dispersion value of 0 at a wavelength of 1,600 nm or more.

10

44. The fiber optic cable according to claim 1, 8 or 26, wherein the connected optical fiber has an average dispersion value ranging from 1 ps/nm-km to 10 ps/nm-km.

15 45. The fiber optic cable according to claim 1, 8, or 26, wherein the operating wavelength range is selected from the group consisting of a range from 1,300 nm to 1,530 nm, a range from 1,400 nm to 1,565 nm, and a range from 1,530 nm to 1,650 nm.

20

46. A wavelength division multiplexing (WDM) optical transmission system having a predetermined channel spacing and a predetermined number of channels, comprising:

a transmitting terminal for providing a plurality of

optical signals respectively having different wavelengths;

a multiplexer connected to the transmitting terminal and adapted to multiplex the optical signals;

5 a plurality of fiber optic cables each including a plurality of connected optical fibers, each of the connected optical fibers being formed of a plurality of optical fibers respectively exhibiting different dispersion values and different dispersion slopes in a predetermined operating wavelength range while having different lengths and different effective areas, the optical fibers being connected to one another in an optional order;

connecting means for interconnecting the fiber optic cables;

15 optical amplifiers for amplifying the optical signal being transmitted through the fiber optic cables;

a demultiplexer for demultiplexing the optical signal transmitted through the fiber optic cables; and

a receiving terminal connected to the demultiplexer and adapted to receive the demultiplexed optical signal.

20

47. A wavelength division multiplexing (WDM) optical transmission system having a predetermined channel spacing and a predetermined number of channels, comprising:

a transmitting terminal for providing a plurality of

optical signals respectively having different wavelengths;

a multiplexer connected to the transmitting terminal and adapted to multiplex the optical signals;

5 a plurality of fiber optic cables each including a plurality of connected optical fibers, each of the connected optical fibers including a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a predetermined operating wavelength range while having a first length and a first effective area, and a second optical fiber
10 exhibiting a second dispersion value and a second dispersion slope in the predetermined operating wavelength range while having a second length and a second effective area, the first and second optical fibers being connected together in an optional order.

15 connecting means for interconnecting the fiber optic cables;

optical amplifiers for amplifying the optical signal being transmitted through the fiber optic cables;

a demultiplexer for demultiplexing the optical signal
20 transmitted through the fiber optic cables; and

a receiving terminal connected to the demultiplexer and adapted to receive the demultiplexed optical signal.

48. A wavelength division multiplexing (WDM) optical

transmission system having a predetermined channel spacing and a predetermined number of channels, comprising:

a transmitting terminal for providing a plurality of optical signals respectively having different wavelengths;

5 a multiplexer connected to the transmitting terminal and adapted to multiplex the optical signals;

a plurality of fiber optic cables each including a plurality of connected optical fibers, each of the connected optical fibers including a first optical fiber exhibiting a first dispersion value and a first dispersion slope in a
10 predetermined operating wavelength range while having a first length and a first effective area, a second optical fiber exhibiting a second dispersion value and a second dispersion slope at the predetermined operating wavelength range while
15 having a second length and a second effective area, a third optical fiber exhibiting the first dispersion value and the first dispersion slope at the predetermined operating wavelength range while having a third length and the first effective area, the first optical fiber, the second optical
20 fiber, and the third optical fiber being connected to one another in this order.

connecting means for interconnecting the fiber optic cables;

optical amplifiers for amplifying the optical signal

being transmitted through the fiber optic cables;

a demultiplexer for demultiplexing the optical signal transmitted through the fiber optic cables; and

a receiving terminal connected to the demultiplexer and
5 adapted to receive the demultiplexed optical signal.

49. The WDM optical transmission system according to any one of claims 46 to 48, wherein the channel spacing is 50 GHz.

10 50. The WDM optical transmission system according to any one of claims 46 to 48, wherein the channel spacing is 100 GHz or more.

51. The WDM optical transmission system according to
15 claim 47, wherein the connecting means connects the first optical fiber of a selected one of the fiber optic cables to the first optical fiber of another one of the fiber optic cables adjacent to the first optical fiber of the selected fiber optic cable while controlling a length of the resultant
20 connected first optical fiber.

52. The WDM optical transmission system according to claim 47, wherein the connecting means connects the first optical fiber of a selected one of the fiber optic cables to

the second optical fiber of another one of the fiber optic cables adjacent to the first optical fiber of the selected fiber optic cable on an optical line.

5 53. The WDM optical transmission system according to claim 48, wherein the connecting means connects the first optical fiber of a selected one of the fiber optic cables to the first optical fiber of another one of the fiber optic cables adjacent to the first optical fiber of the selected
10 fiber optic cable while generating a minimum connection loss.

 54. The WDM optical transmission system according to claim 48, wherein the connecting means connects the third optical fiber of a selected one of the fiber optic cables to
15 the first optical fiber of another one of the fiber optic cables adjacent to the third optical fiber of the selected fiber optic cable while generating a minimum connection loss.

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 February 2001 (22.02.2001)

PCT

(10) International Publication Number
WO 01/13146 A2

(51) International Patent Classification⁷: **G02B**

Dongjak-gu, Seoul 156-020 (KR). **CHUNG, Yun, Chur**
[KR/KR]; 101-401, Hanvit Apt., Oeun-dong, Yusong-gu,
Taejon 305-333 (KR).

(21) International Application Number: PCT/KR00/00899

(22) International Filing Date: 12 August 2000 (12.08.2000)

(74) Agents: **BAEK, Duk, Yeul** et al.; Marine Center Main
Building, 18th floor, 118, 2-ga, Namdaemun-ro, Chung-gu,
Seoul 100-770 (KR).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): AU, BR, CA, CN, IN, JP,
MX, RU, US.

(30) Priority Data:
1999/33359 13 August 1999 (13.08.1999) KR

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).

(71) Applicants (*for all designated States except US*): **LG CA-
BLE LTD.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu,
Seoul 150-721 (KR). **KOREA ADVANCED INSTITUTE
OF SCIENCE AND TECHNOLOGY** [KR/KR]; 373-1,
Kusong-dong, Yusong-gu, Taejon 305-701 (KR).

Published:


— Without international search report and to be republished
upon receipt of that report.

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **KIM, Dong,
Young** [KR/KR]; 107-303, Daerim Apt., Daebang-dong,

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: FIBER OPTIC CABLE FOR INCREASED TRANSMISSION CAPACITY AND WAVELENGTH DIVISION MULTI-
PLEXING OPTICAL TRANSMISSION SYSTEM USING THE SAME

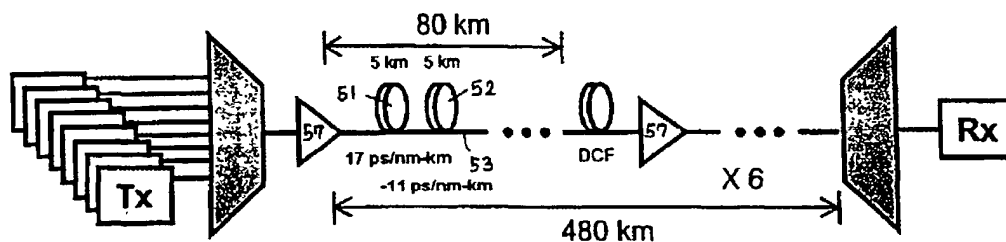

(57) Abstract: Disclosed is a fiber optic cable for a wavelength division multiplexing (WDM) optical transmission system including a plurality of connected optical fibers, wherein each of the connected optical fibers is formed of a plurality of optical fibers respectively exhibiting different dispersion values and different dispersion slopes in a predetermined operating wavelength range while having different lengths and different effective areas, the optical fibers being connected to one another in an optional order.

Fig. 1

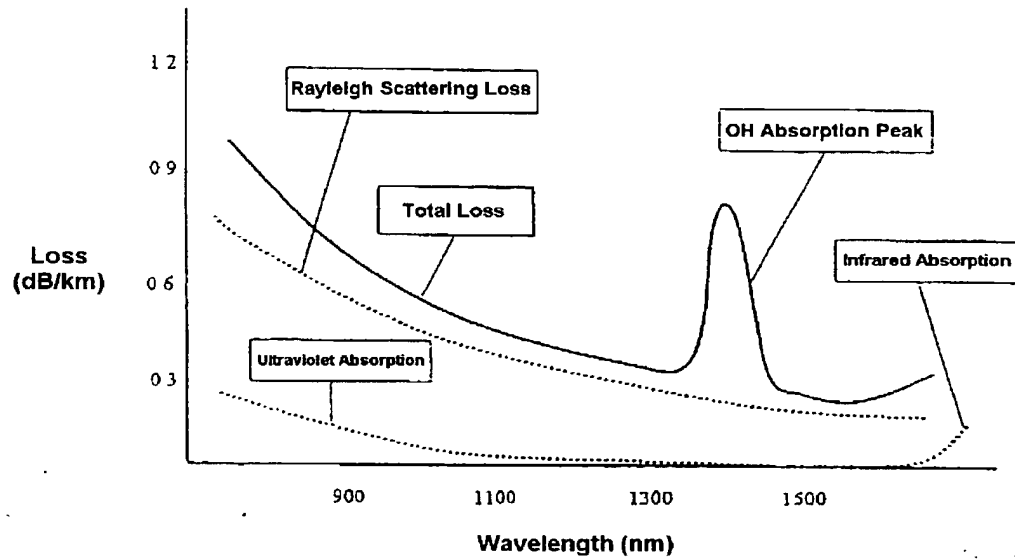


Fig. 2a


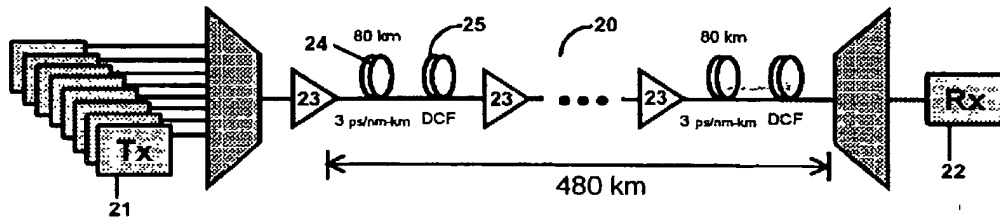


Fig. 2b

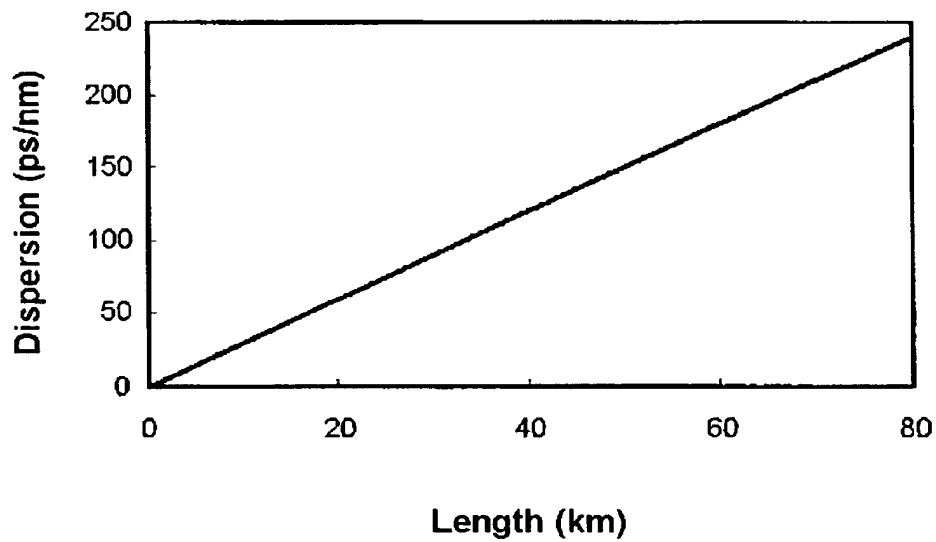

$$D_{cf} = 3.0 \text{ ps/nm-km}$$

Fig. 3a

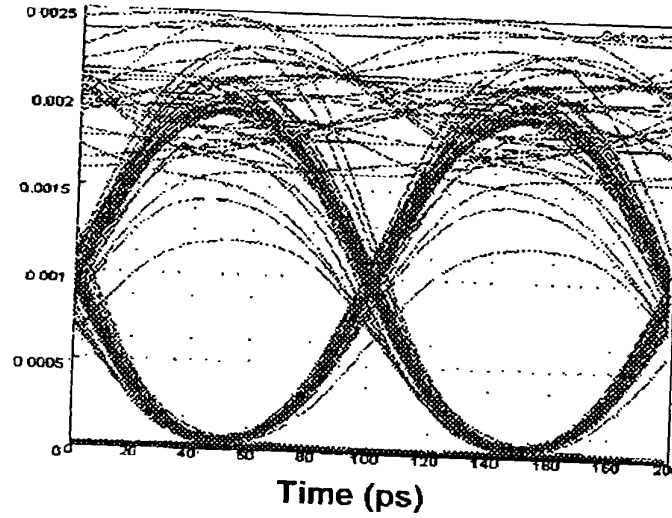


Fig. 3b

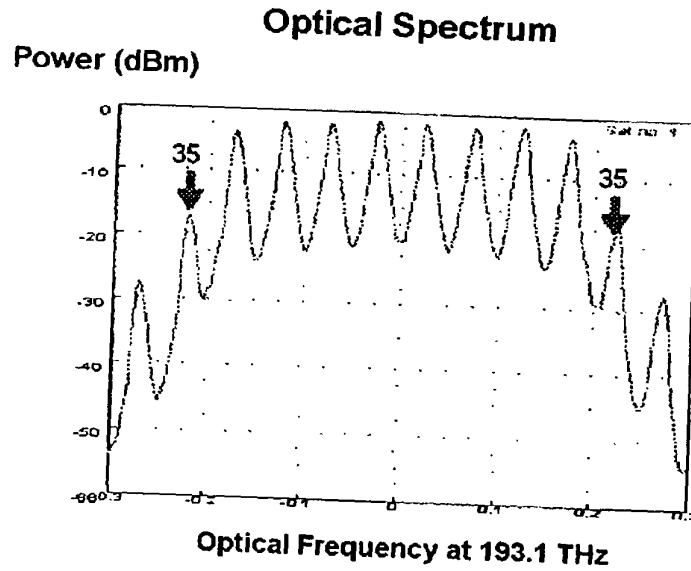


Fig. 4a

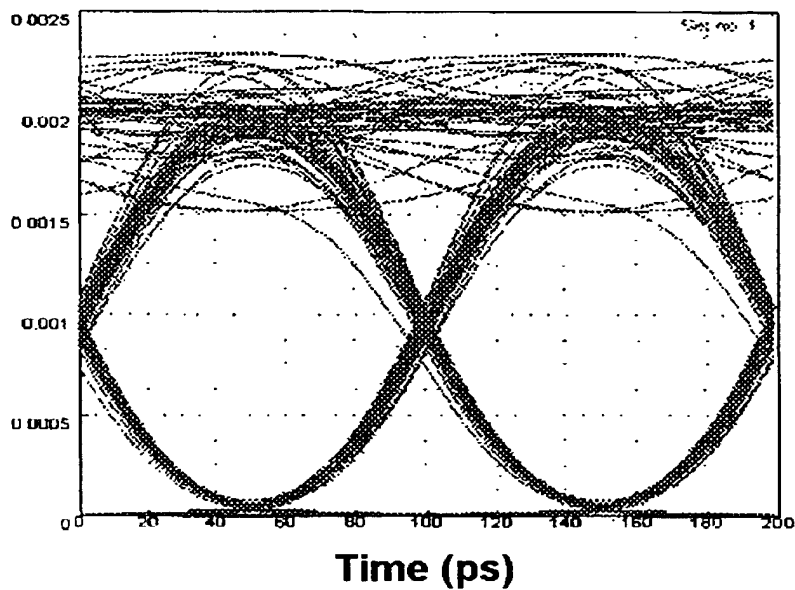


Fig. 4b

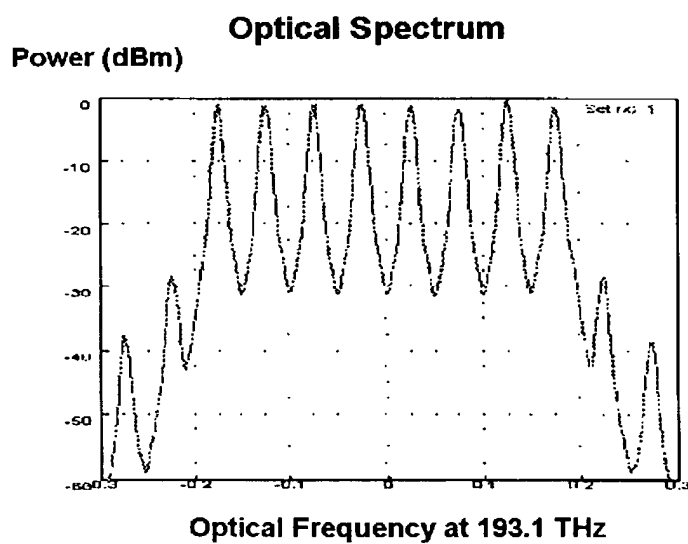


Fig. 5

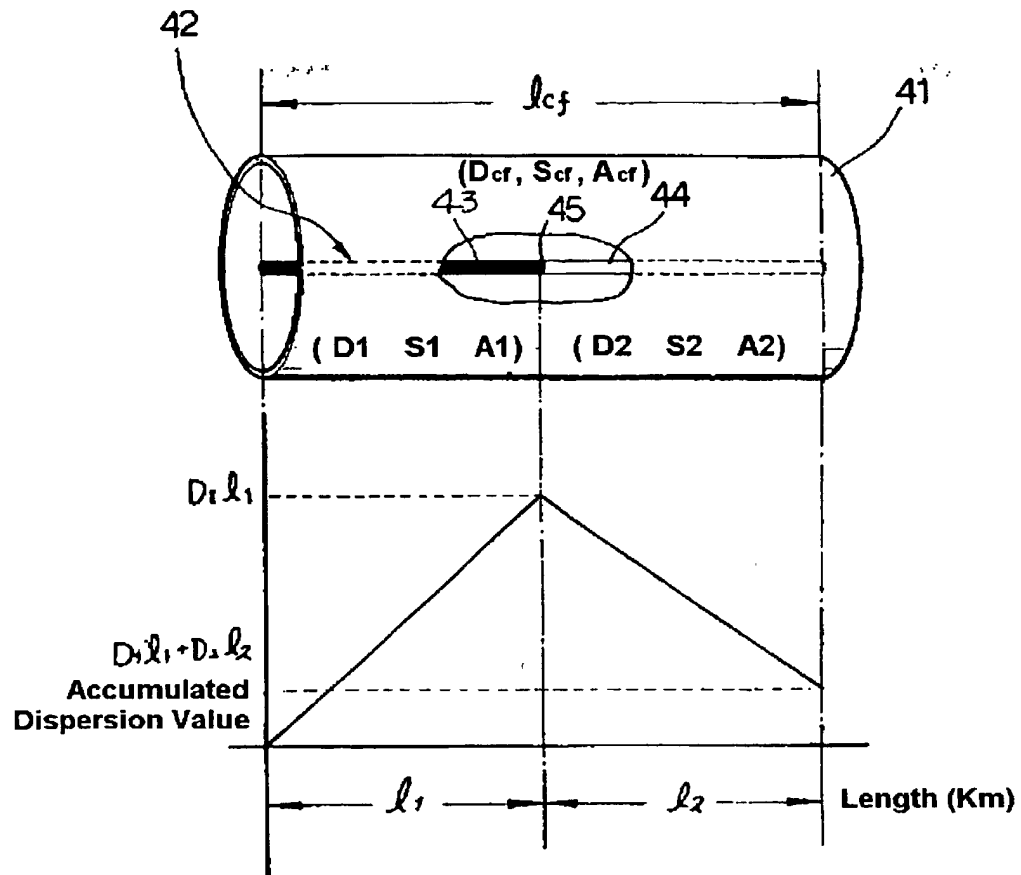


Fig. 6a


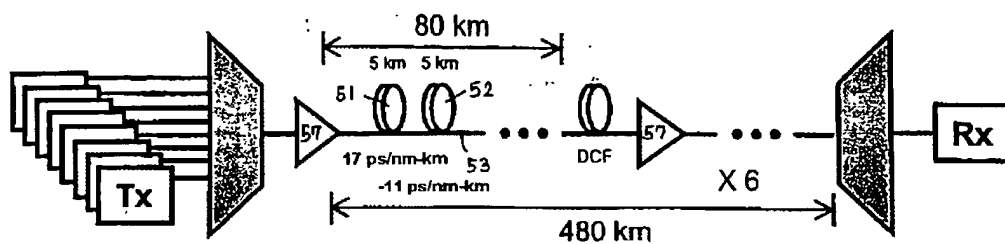


Fig. 6b

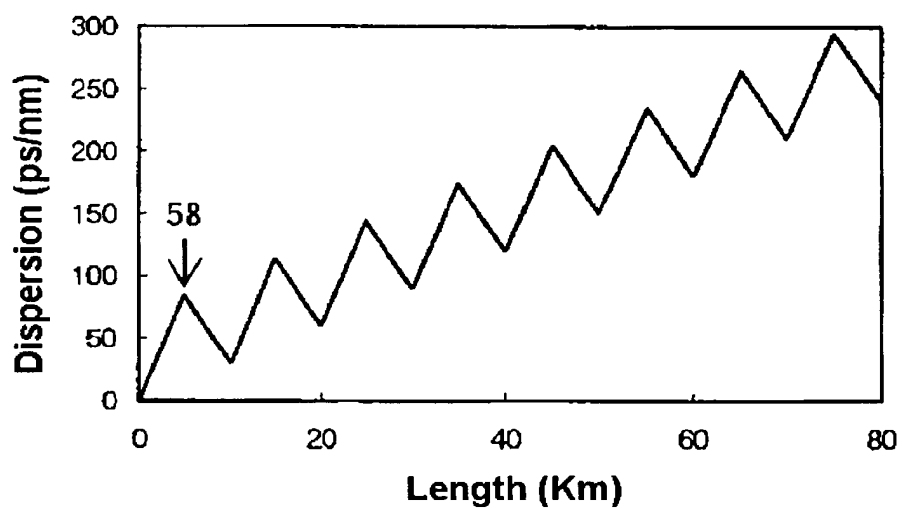

Dcf = 3.0 ps/nm-km

Fig. 7a

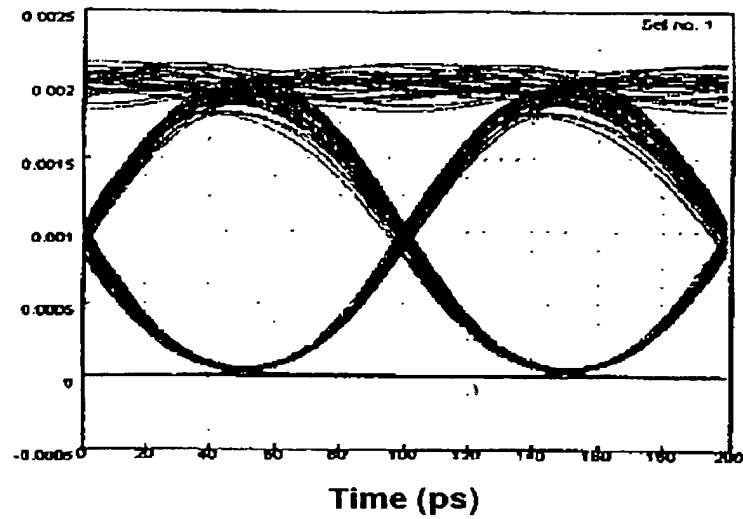


Fig. 7b

Optical Spectrum

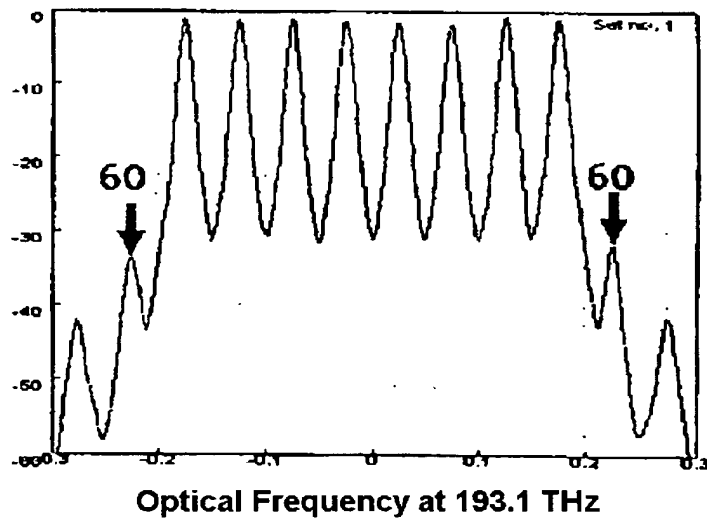
Power (dBm)

Fig. 8

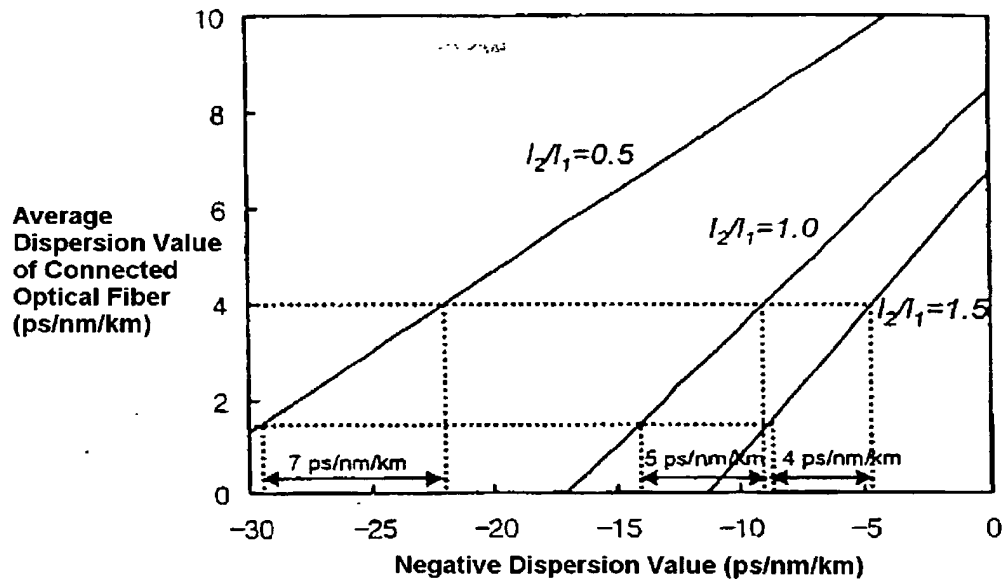


Fig. 9a

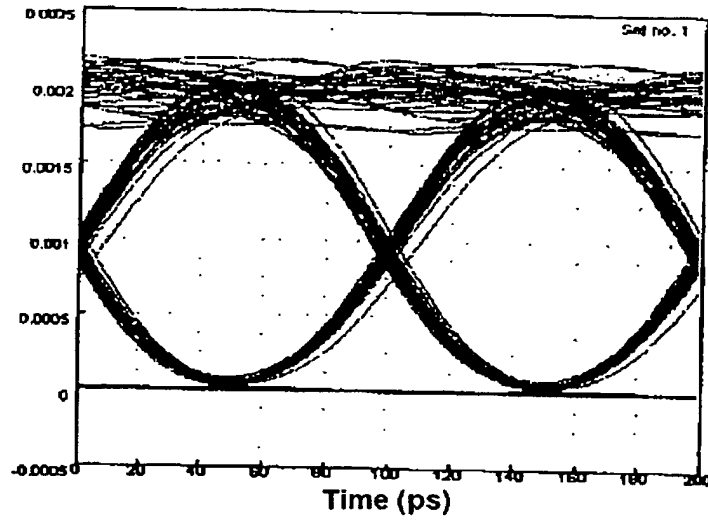


Fig. 9b

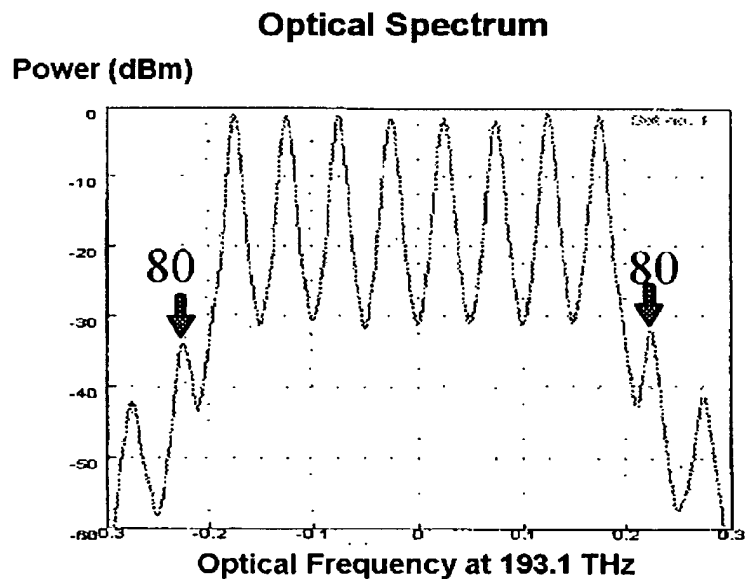


Fig. 10

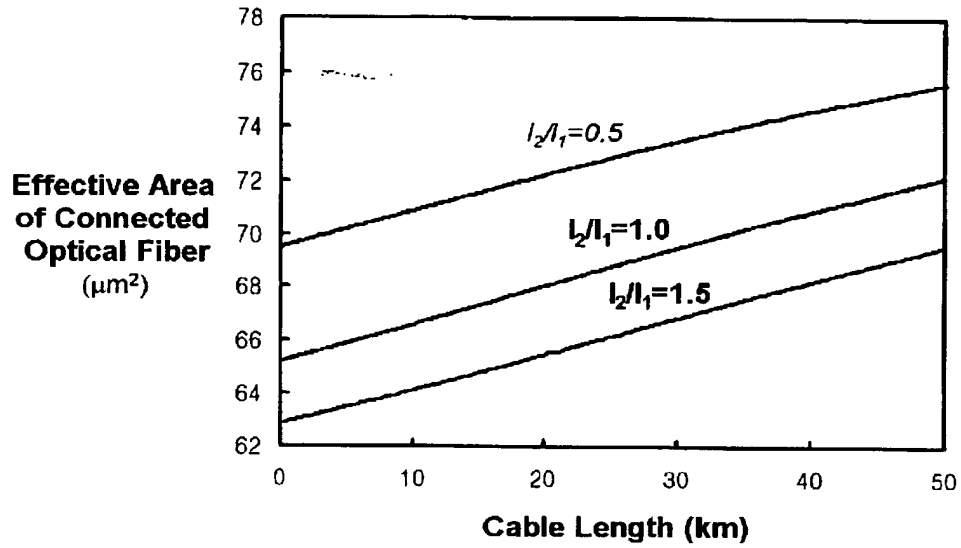


Fig. 11


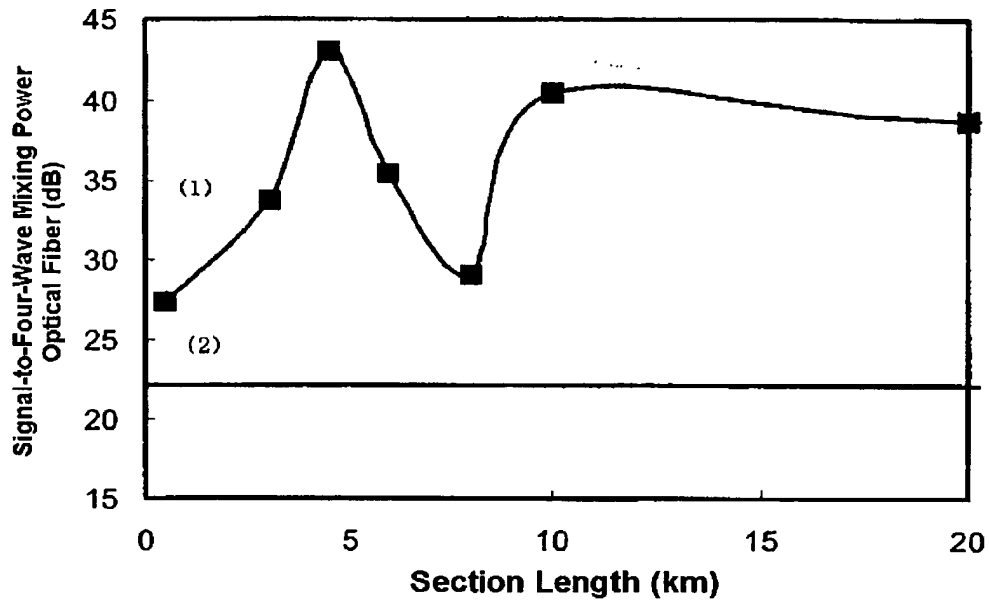


Fig. 12

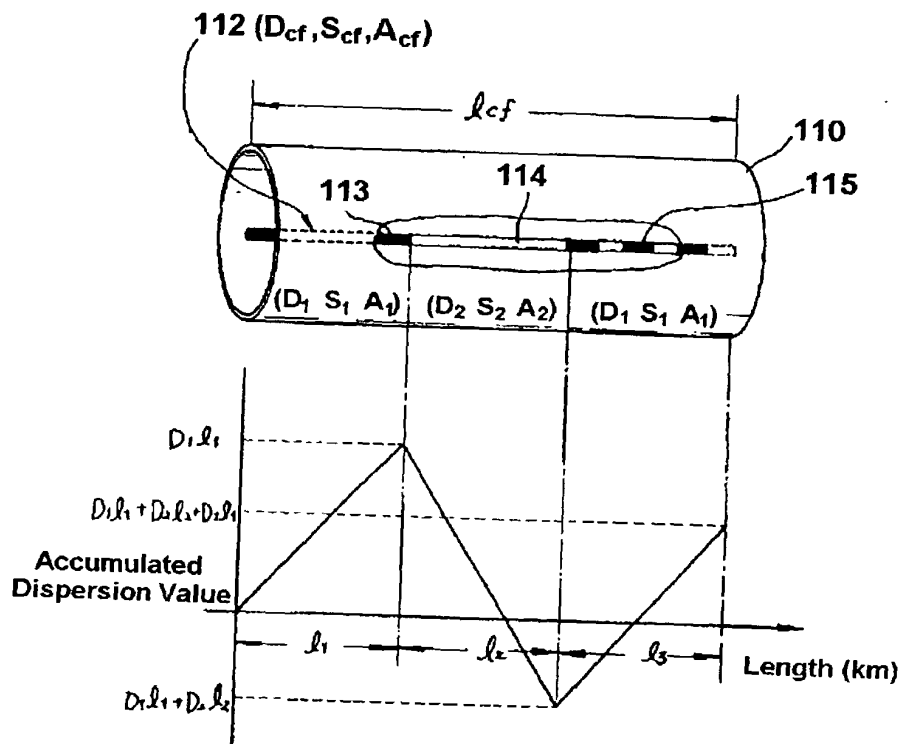

Length (km)	Dispersion (ps/nm)
0	0
5	40
10	-10
15	70
20	15
25	100
30	45
35	125
40	75
45	155
50	100
55	180
60	130
65	210
70	155
75	240
80	180

Dcf=3.0 ps/nm-km

Fig. 14a

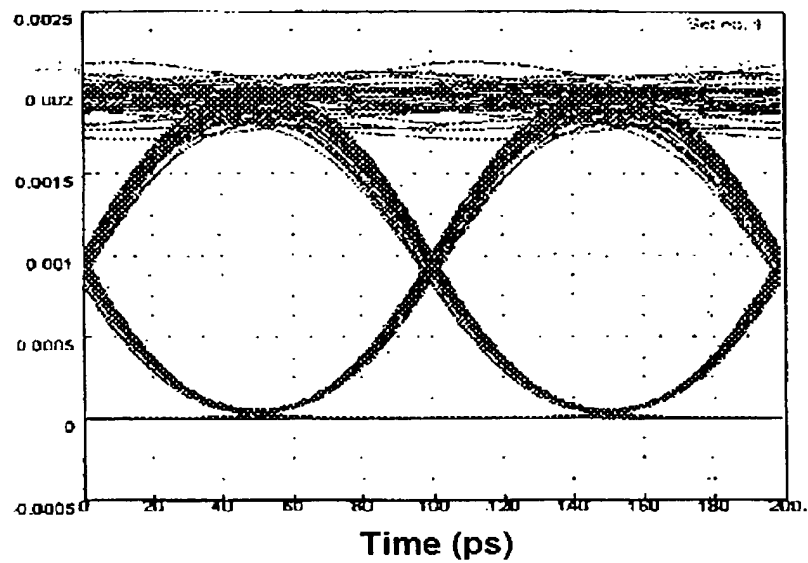


Fig. 14b

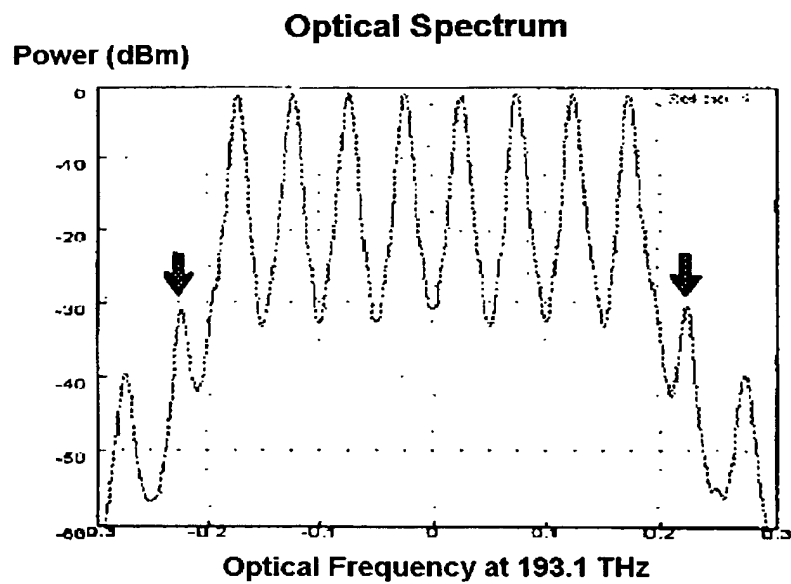


Fig. 15a

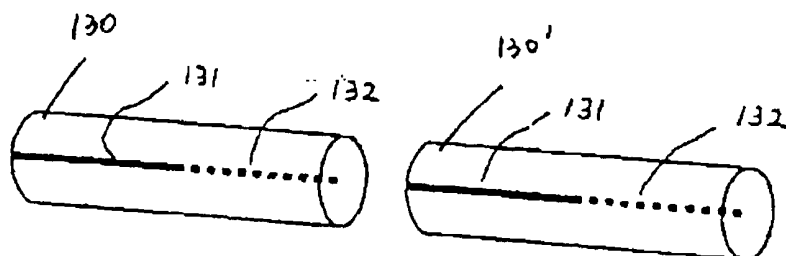


Fig. 15b


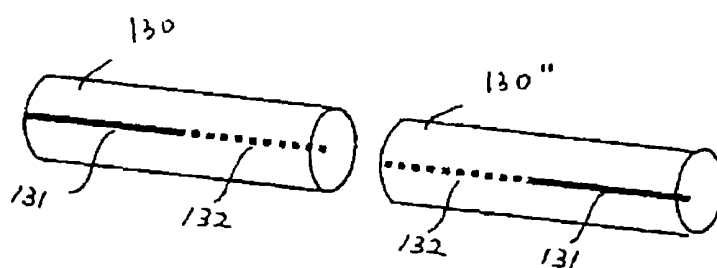


Fig. 15c

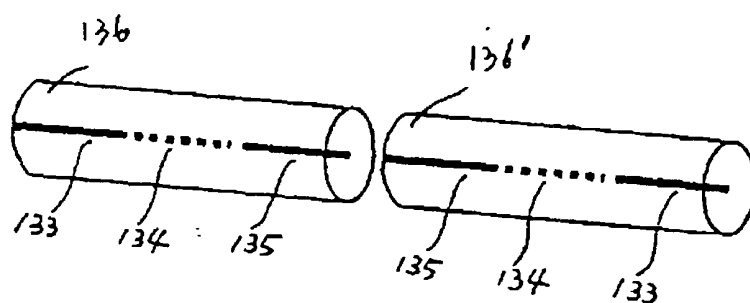

Express Mail No: EL9913299764US

Attorney Docket: Lee&KoUSNP

IN THE UNITED STATES PATENT
AND TRADEMARK OFFICE

In Re the Application of: Dong Young Kim and Yun Chur Chung

Serial Number: (original KR) 1999-3359 New: _____
(PCT) PCT/KR00/00899

Filed: (original KR) 13 August 1999 New: _____
(PCT) 12 August 2000

For: Fiber Optic Cable for Increased Transmission Capacity and Wavelength
Division Multi-Plexing Optical Transmission System Using the Same

Assignees: LG Cable Ltd. and Korean Advanced Institute of Science and Technology

DECLARATION FOR PATENT APPLICATION

This Declaration is made by Dong Young Kim and Yun Chur Chung.

1-00
I, Dong Young Kim, hereby declare:

- I am a citizen of the Republic of Korea and that my residence and mailing address is 103-303, Daerim Apt., Daebang-dong, Dongjak-gu, Seoul, Republic of Korea, 156-020. *KRX*

2-00
I, Yun Chur Chung, hereby declare:

- I am a citizen of the Republic of Korea and that my residence and mailing address is 101-401, Hanvit Apt., Oeun-dong, Yusong-gu, Taejeon, Republic of Korea, 305-333. *KRX*

We, Dong Young Kim and Yun Chur Chung, each hereby declare:

We believe that we are the original, first, and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled an "Fiber Optic Cable for Increased Transmission Capacity and Wavelength Division Multi-Plexing Optical Transmission System Using the Same" and:

- Republic of Korea Application Number 1999-33359 filed 13 August 1999 originally entitled "Fiber Optic Cable for Increased Transmission Capacity and Wavelength Division Multi-Plexing Optical Transmission System Using the Same"; and also
- PCT Application Number PCT/KR00/00899, filed on 12 August 2000, entitled "Fiber Optic Cable for Increased Transmission Capacity and Wavelength Division Multi-Plexing Optical Transmission System Using the Same," designating the United States of America;

the specifications of which have been provided to us at or prior to the time of signing this declaration, and of which we hereby claim the benefit of and priority pursuant to 35 U.S.C. ' 119, 120, or 365 we have identified in the request of this application, in compliance with PCT Rule 4.10, any claim to foreign priority and we have identified above by application number, country or Member of the World Trade Organization, day, month and year of filing, any application for a patent or inventor=s certificate filed in a country other than the United States of America, including any PCT international application designating at least one country other than the United States of America, having a filing date before that of the application on which foreign priority is claimed.

We hereby declare that the above specifications are intended to include disclosure or claims directed to, individually or in combination: embodiments of the invention which may encompass a device, apparatus, method, process, or business method; embodiments of the invention which may encompass permutations or combinations of any aspects of the invention; any aspect of the invention conceived or developed as separate inventions; and any aspect of the invention independent of any initial context considered as preferred embodiments. We also authorize and support this application for patent protection in the United States, and for similar protection in foreign countries, each to be sought to the extent or breadth any owner desires or deems appropriate. We acknowledge that each of the attorneys and the firm filing this application are attorneys for the assignee LG Cable Ltd. and Korean Advanced Institute of Science and Technology only.

We hereby state that we have reviewed and understand the contents of the specification entitled "Fiber Optic Cable for Increased Transmission Capacity and Wavelength Division Multi-Plexing Optical Transmission System Using the Same," including any claims.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Date: February 26, 2002


Dong Young Kim

Date: Feb. 26, 2002


Witness

Date: February 26, 2002 Yun Chur Chung
Yun Chur Chung

Date: Feb. 26, 2002 Suburung
Witness